

NEW


Employing a wire-type fuse-element, this $\phi 6.35 \times 20$ mm size fuse is rated for currents from 1 A to 20 A at AC 250 V. This fuse has obtained certification for both the United States and Canada under the UL Component Recognition Service, and has been issued a conformity test certificate per the Electrical Appliance and Material Safety Law of Japan.

250VTMCR N1 (Inrush-withstand)


RoHS *1

AC250V

Scale: 1/1

Lead wire diameter: $\phi 1.2$

Unit: mm

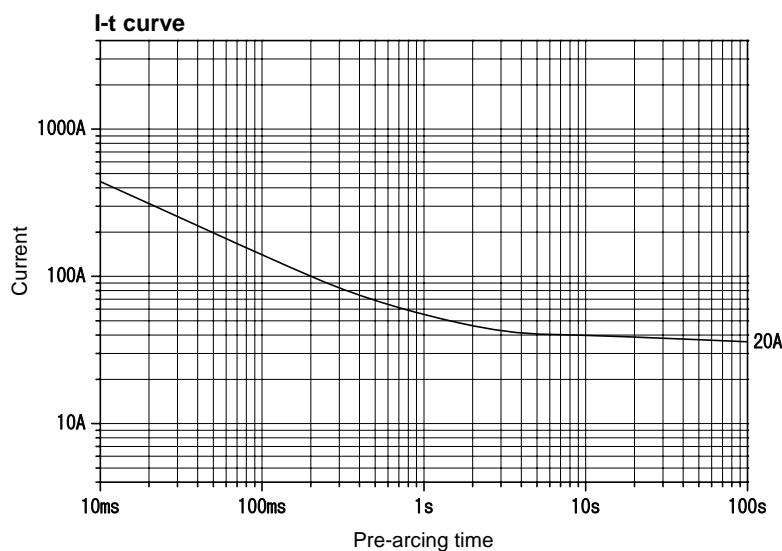

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*2	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC250V	C-UL US Recognized	1A - 20A	100A	PF 0.7 - 0.8	1.0 I_N until temperature stabilization occurs.	75K or less at 1.0 I_N	Within 2min at 2.0 I_N
	<PS>E JET				1.3 I_N until temperature stabilization occurs.	At 1.15 I_N , 140K or less at the center, 60K or less at the contact	Within 60min at 1.6 I_N Within 2min at 2.0 I_N

*1: High melting temperature type solder containing more than 85 wt% lead is used in this product.

*2: Any rated current value can be selected within this range.