

NEW

The DC125VTLKR, a cartridge-type fuse with leads, has been developed to protect against lightning-induced surges. This fuse employs a wire-type fuse-element and achieves a rated current of 35 A and a rated breaking current of 1000 A at a rated voltage of DC 125 V.


DC125VTLKR (Inrush-withstand)

RoHS *1

DC125V




Scale: 1/1

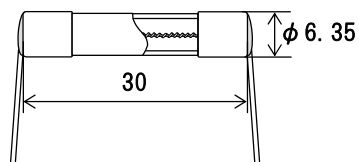

Lead wire diameter: ϕ 1.2

Unit: mm

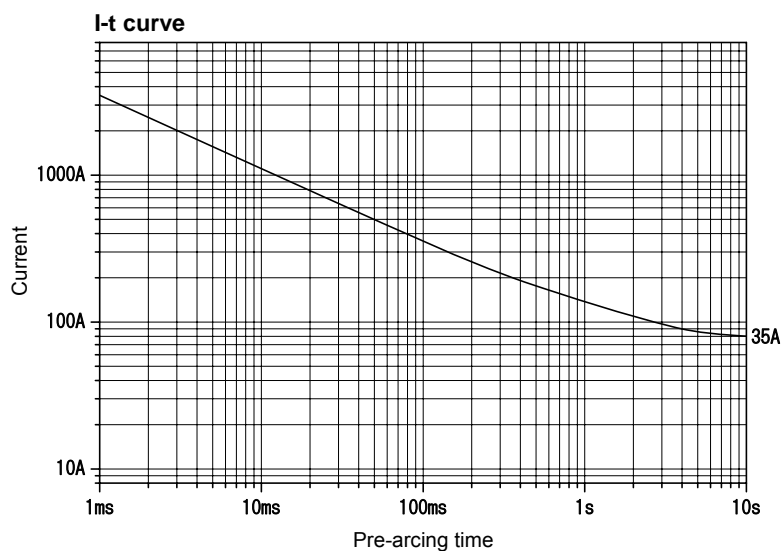

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) *2	Rated breaking current		Current carrying capacity $1.0I_N$	Overload operation $2.0I_N$
DC125V	C-UL US Recognized	800mA - 35A	1000A	Resistive circuit	Until temperature stabilization occurs.	Within 2min

*1: High melting temperature type solder containing more than 85 wt% lead is used in this product.

*2: Any rated current value can be selected within this range.