


# NSD10 (Time-delay)

RoHS


AC32V



Scale: 1/1



Unit: mm

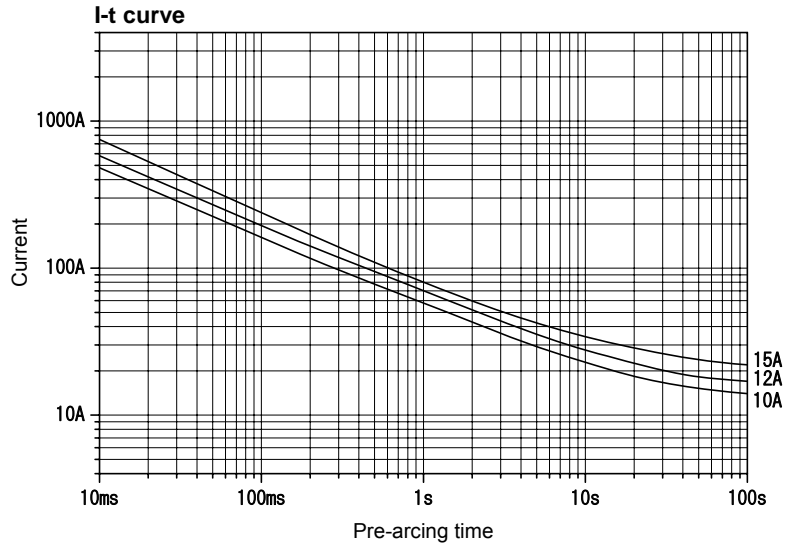

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current ( $I_N$ ) <sup>*1</sup>	Rated breaking current		Current carrying capacity $1.1I_N$	Temp. rise $1.1I_N$	Overload operation
AC32V	UL Recognized CSA Certified	Over 8A - 15A	3000A	PF 0.7 - 0.8	15min or more after temperature stabilization occurs.	70K or less	Within 60min at $1.35I_N$ 12s - 2min inclusive at $2.0I_N$

\*1: Any rated current value can be selected within this range.

# DCSU2 (Normal-acting)

Over 5A - 15A:  
Over 15A - 20A:


RoHS  
RoHS

Pb


DC60V



Scale: 1/1



Unit: mm

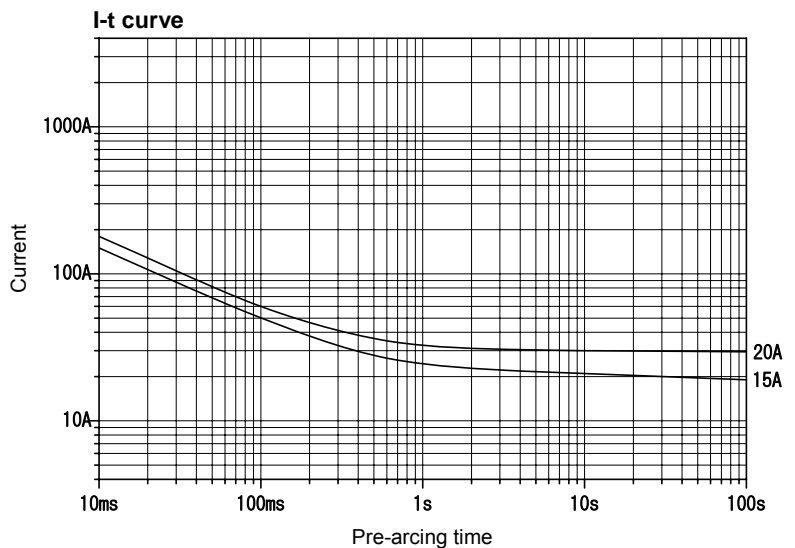

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current ( $I_N$ ) <sup>*1</sup>	Rated breaking current		Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
DC60V	UL Recognized	Over 5A - 20A	100A	Resistive circuit	15min or more after temperature stabilization occurs.	100K or less	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$

\*1: Any rated current value can be selected within this range.