


SHV5 (Quick-acting)

RoHS **Pb**

AC600V




Scale: 1/1

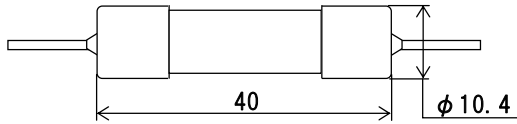

Lead wire diameter: ϕ 1.2

Unit: mm

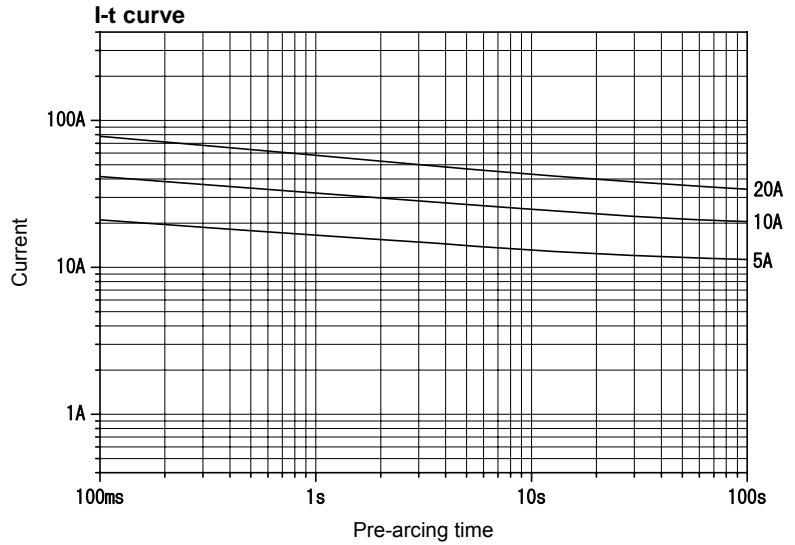

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Rated current (I_N)	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC600V	UL Recognized CSA Component Acceptance	5A, 10A, 15A, 20A	10000A PF 0.7 - 0.8	4h or more	100K or less	Within 60s at $2.6I_N$ Within 1s at $3.6I_N$


NSHV3 (Inrush-withstand protector)

1A - 6.3A: RoHS **Pb**
Over 6.3A - 10A: RoHS

AC500V




Scale: 1/1

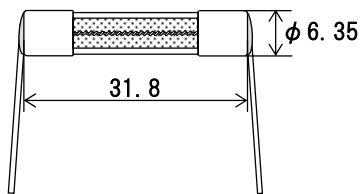

Lead wire diameter: ϕ 1.0

Unit: mm

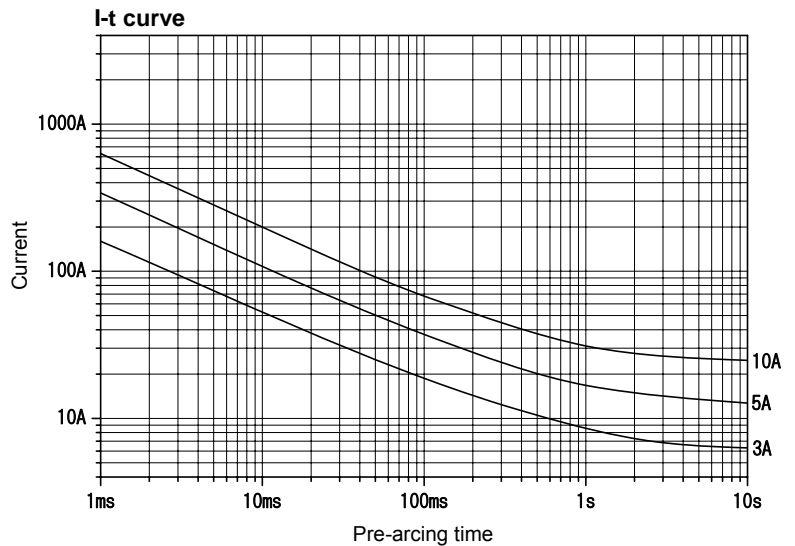

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Maximum working voltage	Certification	Current (I_N) range *1	Maximum breaking current	Current carrying capacity	Temp. rise $1.0I_N$	Overload operation $2.1I_N$
AC500V	—	1A - 10A	500A Resistive circuit	—	75K or less	Within 60min

*1: Any current value can be selected within this range.