

SHV11 (Inrush-withstand)


RoHS

AC400V

DC400V




Scale: 1/1



Lead wire diameter: ϕ 0.8

Unit: mm

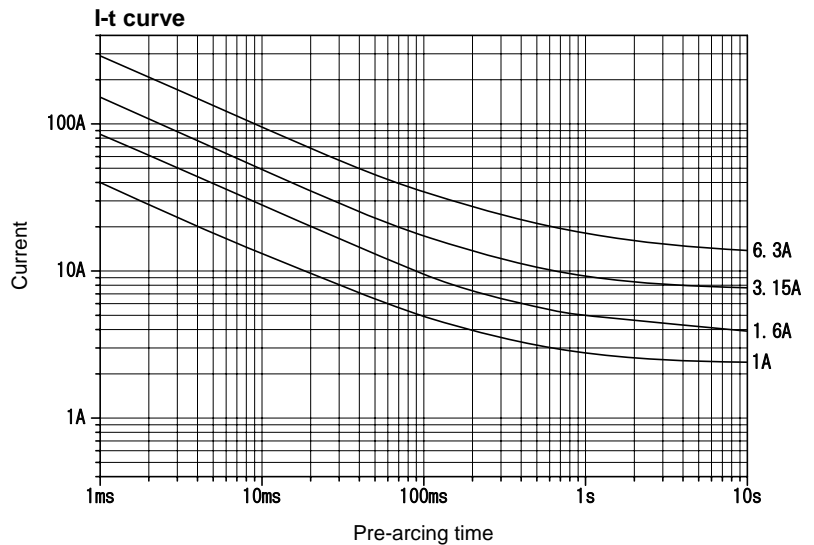

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*2	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation $2.1I_N$	
AC400V	C-UL US Recognized	100mA - 6.3A	500A	Resistive circuit	Until temperature stabilization occurs.	75K or less	Within 30min
DC400V			*1				
		100mA - 2.5A	1500A				

*1: This specification is based on SOC internal testing.

*2: Any rated current value can be selected within this range.


SHV1 (Inrush-withstand)

RoHS

AC380V




Scale: 1/1



Lead wire diameter: ϕ 0.8

Unit: mm

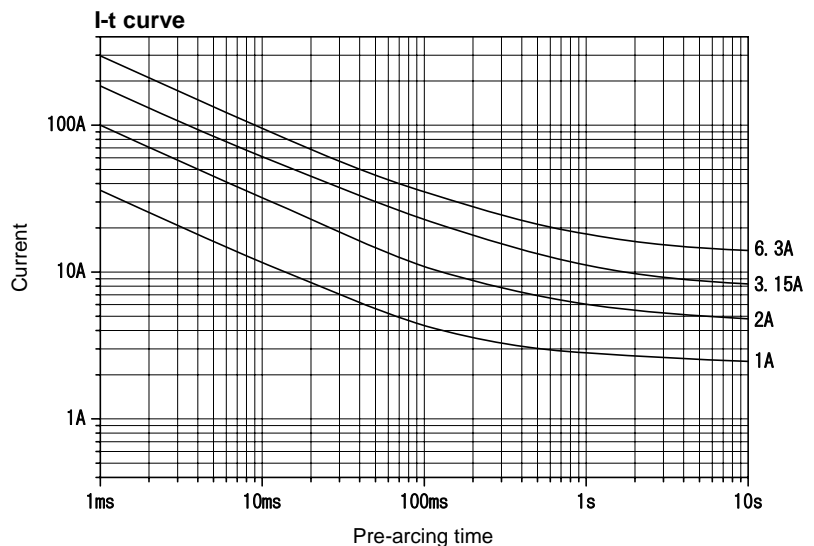

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation $2.1I_N$	
AC380V	UL Recognized CSA Component Acceptance	1A - 6.3A	500A	Resistive circuit	4h or more	75K or less	Within 60min

*1: Any rated current value can be selected within this range.