





Scale: 1/1

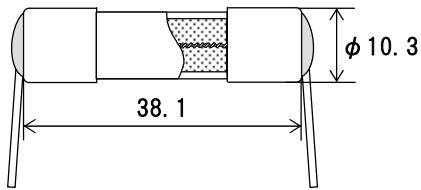

Lead wire diameter: ϕ 1.2

Unit: mm

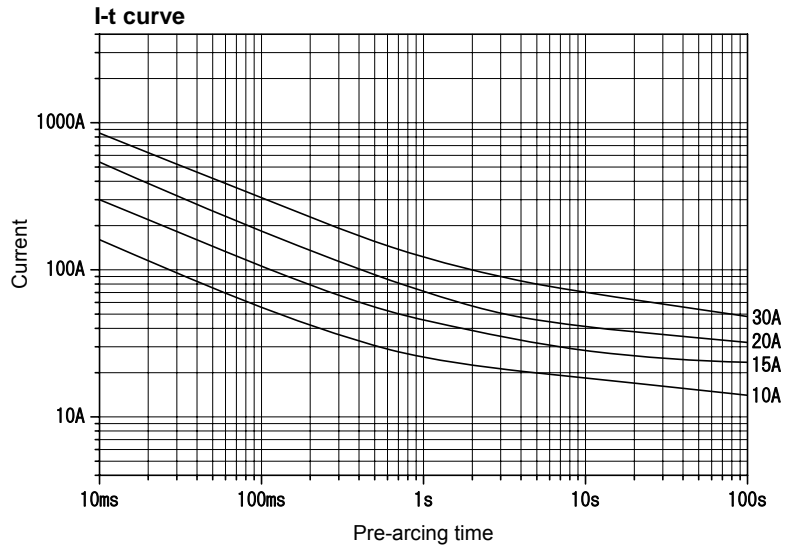

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current		Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
			1500A	PF 0.7 - 0.8			
AC250V	UL Recognized CSA Certified	100mA - 30A	1500A	PF 0.7 - 0.8	15min or more after temperature stabilization occurs.	75K or less	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$

*1: Any rated current value can be selected within this range.