





Scale: 1/1



Lead wire diameter: φ 0.8

Unit: mm

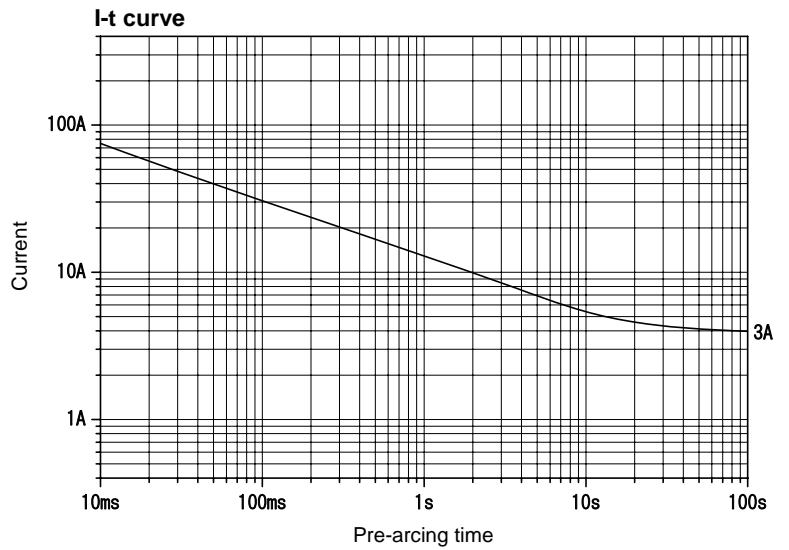

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification <sup>*1</sup>	Range of rated current ( $I_N$ ) <sup>*2</sup>	Rated breaking current		Current carrying capacity $1.1I_N$	Temp. rise $1.1I_N$	Overload operation
			100A	PF 0.7 - 0.8			
AC250V	<PS>E JET	100mA - 8A	100A	PF 0.7 - 0.8	Until temperature stabilization occurs.	140K or less at the center, 60K or less at the contact	<sup>*3</sup>

<sup>\*1</sup>: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

<sup>\*2</sup>: Any rated current value can be selected within this range.

<sup>\*3</sup>:

Rated current	$1.35I_N$	$2.0I_N$
100mA - 3A	Within 60min	5s - 2min
Over 3A - 8A		12s - 2min