





Scale: 1/1

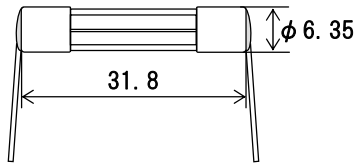

Lead wire diameter: ϕ 0.8

Unit: mm

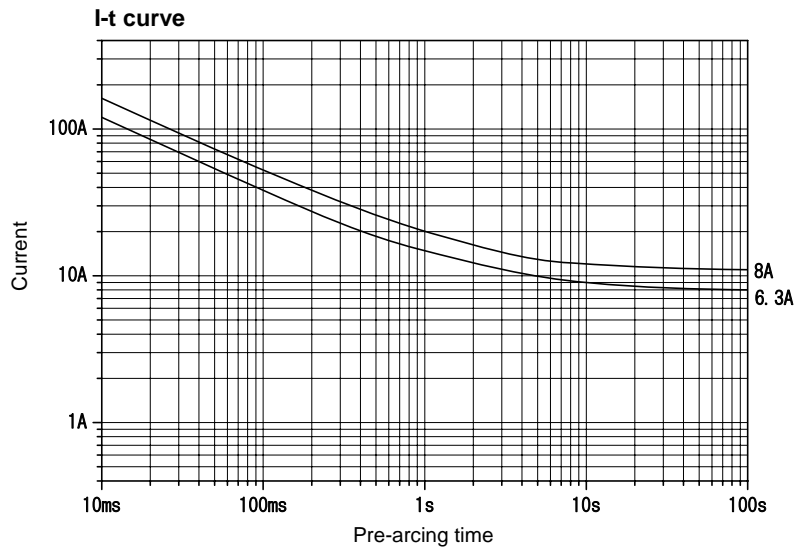

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current		Current carrying capacity	Temp. rise $1.1 I_N$	Overload operation
AC250V	UL Listed CSA Certified	Over 5A - 8A	200A	PF 0.7 - 0.8	^{*2}	70K or less	Within 60min at $1.35 I_N$ Within 2min at $2.0 I_N$
	<PS>E JET		100A		^{*3}	140K or less at the center, 60K or less at the contact	

^{*1}: Any rated current value can be selected within this range.
^{*2}: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.
^{*3}: $1.1 I_N$ until temperature stabilization occurs.