





Scale: 1/1

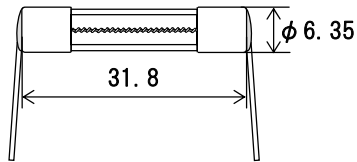

Lead wire diameter:  $\phi 0.8$

Unit: mm

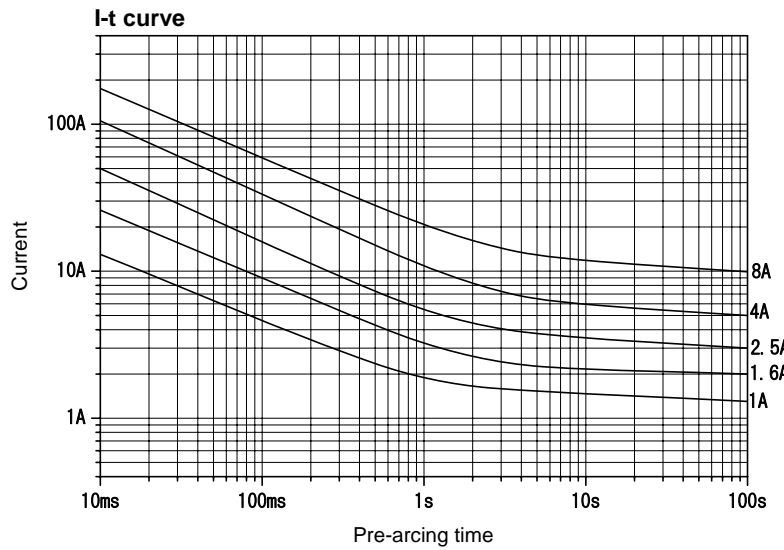

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current ( $I_N$ ) <sup>*2</sup>	Rated breaking current	Current carrying capacity	Temp. rise $1.1I_N$	Overload operation	
AC250V	UL Listed CSA Certified	100mA - 1A	10000A	PF 0.7 - 0.8	*3	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$	
		Over 1A - 8A	200A				
	<PS>E JET <sup>*1</sup>	100mA - 1A	500A		*4		140K or less at the center, 60K or less at the contact
		Over 1A - 8A	100A				

\*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

\*2: Any rated current value can be selected within this range.

\*3:  $1.1 I_N$  for 15 min or more after temperature stabilization occurs.

\*4:  $1.1 I_N$  until temperature stabilization occurs.