

CES15 (Inrush-withstand)

100mA - 8A / Over 15A - 25A:
Over 8A - 15A / Over 25A - 30A:


RoHS
RoHS

Pb

AC250V




Scale: 1/1

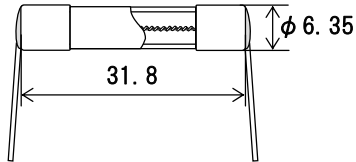

Lead wire diameter:
φ 0.8 (100mA - 8A)
φ 1.2 (Over 8A - 30A)

Unit: mm

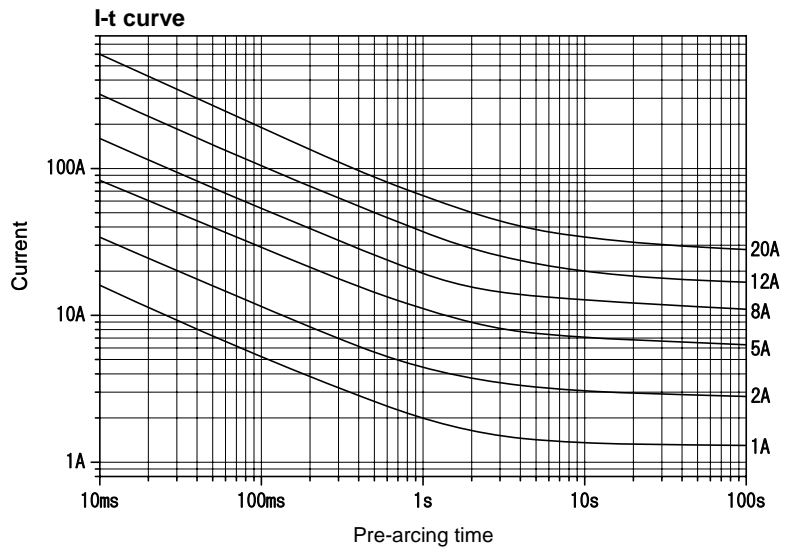

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC250V	UL Recognized CSA Component Acceptance	100mA - 15A	200A	PF 0.7 - 0.8	*2	70K or less at $1.1I_N$	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$
	C-UL US Recognized	Over 15A - 30A					

*1: Any rated current value can be selected within this range.
*2: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.
*3: $1.0 I_N$ until temperature stabilization occurs.