

CES15 N1 (Inrush-withstand)

100mA - 8A / Over 15A - 25A:

RoHS

Pb


Over 8A - 15A:

RoHS

AC250V




Scale: 1/1

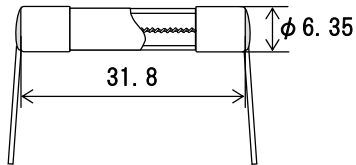

Lead wire diameter:
 ϕ 0.8 (100mA - 8A)
 ϕ 1.2 (Over 8A - 25A)

Unit: mm

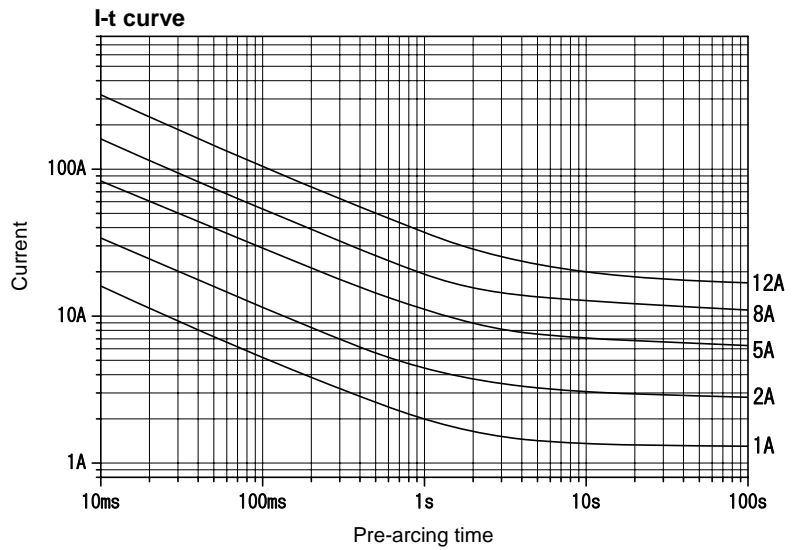

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC250V	UL Recognized CSA Component Acceptance	100mA - 15A	200A	PF 0.7 - 0.8	*3	70K or less at 1.1 I_N	Within 60min at 1.35 I_N Within 2min at 2.0 I_N
	C-UL US Recognized	Over 15A - 25A			*4	—	
	<PS>E JET ^{*1}	100mA - 25A	100A		*5	At 1.1 I_N , 140K or less at the center, 60K or less at the contact	

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

*3: 1.1 I_N for 15 min or more after temperature stabilization occurs.

*4: 1.0 I_N until temperature stabilization occurs.

*5: 1.1 I_N until temperature stabilization occurs.