





Scale: 1/1



Lead wire diameter:
 ϕ 0.8 (100mA - 8A)
 ϕ 1.0 (Over 8A - 18A)

Unit: mm

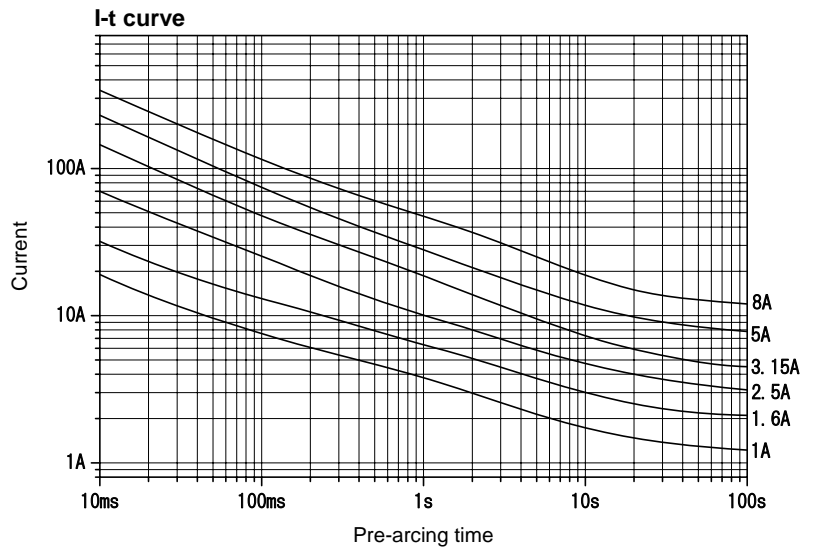

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current	Current carrying capacity $1.1I_N$	Temp. rise $1.1I_N$	Overload operation
AC250V	UL Listed	100mA - 3A	10000A	15min or more after temperature stabilization occurs.	70K or less	*2
	CSA Certified		100A			
	UL Listed CSA Certified	Over 3A - 8A	200A		100K or less	
	UL Recognized CSA Component Acceptance	Over 8A - 18A	500A			

*1: Any rated current value can be selected within this range.

*2:

Rated current	$1.35I_N$	$2.0I_N$
100mA - 3A	Within 60min	5s - 2min
Over 3A - 18A		12s - 2min