





Scale: 1/1



Lead wire diameter: $\phi 0.8$

Unit: mm

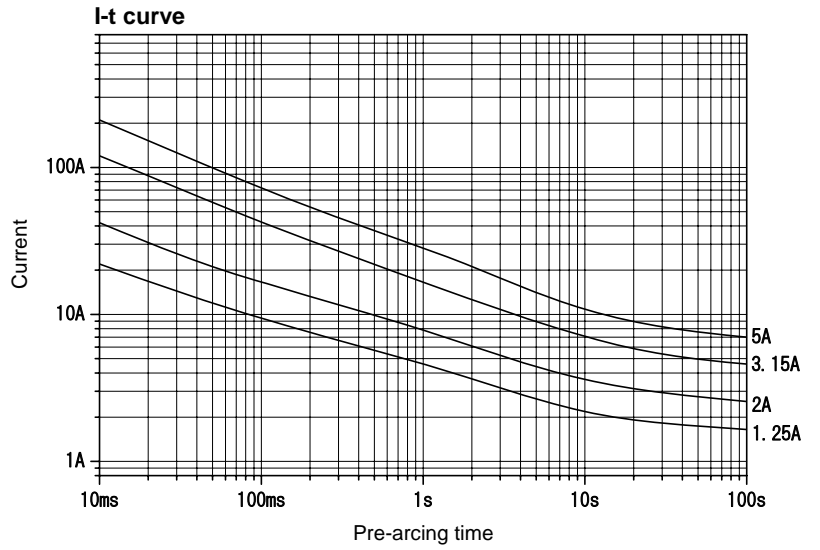

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*2	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC250V	UL Listed CSA Certified	62mA - 3A	100A	PF 0.7 - 0.8	*3	70K or less at $1.1I_N$	*6
	UL Recognized CSA Component Acceptance	Over 3A - 8A			*4	70K or less at $1.0I_N$	
	<PS>E JET *1	62mA - 8A			*5	At $1.1I_N$, 140K or less at the center, 60K or less at the contact	

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

*3: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.

*4: $1.0 I_N$ for 15 min or more after temperature stabilization occurs.

*5: $1.1 I_N$ until temperature stabilization occurs.

*6:

Rated current	$1.35I_N$	$2.0I_N$
62mA - 3A	Within 60min	5s - 2min
Over 3A - 8A		12s - 2min