


ST5 (Inrush-withstand)

100mA - 8A: RoHS **Pb**
 Over 8A - 30A: RoHS

AC125V
 DC125V




Scale: 1/1

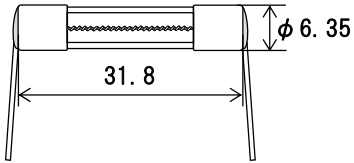

Lead wire diameter:
 φ 0.8 (100mA - 8A)
 φ 1.0 (Over 8A - 15A)
 φ 1.2 (Over 15A - 30A)

Unit: mm

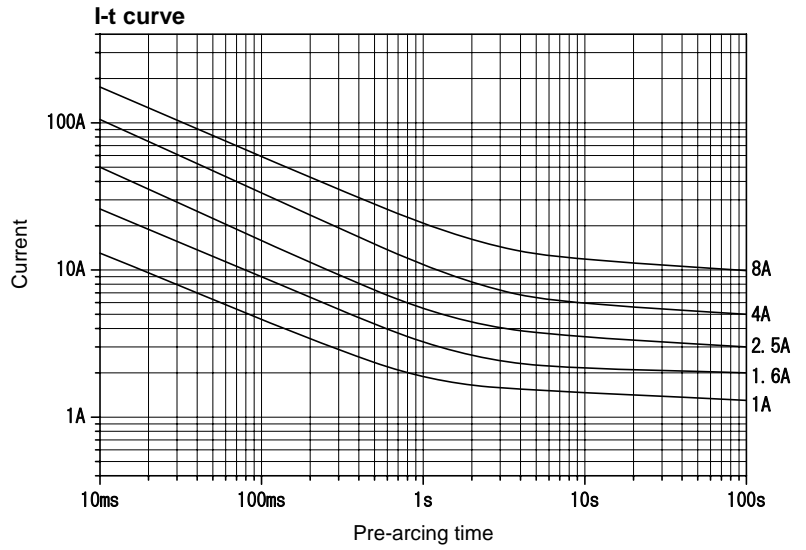

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current	Current carrying capacity	Temp. rise	Overload operation
AC125V	UL Listed CSA Certified	100mA - 8A	10000A	PF 0.7 - 0.8	*2	70K or less at 1.1 I_N
	UL Recognized CSA Component Acceptance	Over 8A - 30A	500A			
DC125V				*3	200K or less at 1.0 I_N	Within 60min at 1.35 I_N Within 2min at 2.0 I_N

*1: Any rated current value can be selected within this range.
 *2: 1.1 I_N for 15 min or more after temperature stabilization occurs.
 *3: 1.0 I_N for 15 min or more after temperature stabilization occurs.