


ST5 N1 (Inrush-withstand)

100mA - 8A: RoHS **Pb**
 Over 8A - 10A: RoHS

AC125V
 DC125V




Scale: 1/1

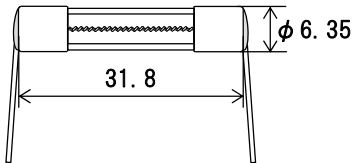

Lead wire diameter:
 ϕ 0.8 (100mA - 8A)
 ϕ 1.0 (Over 8A - 10A)

Unit: mm

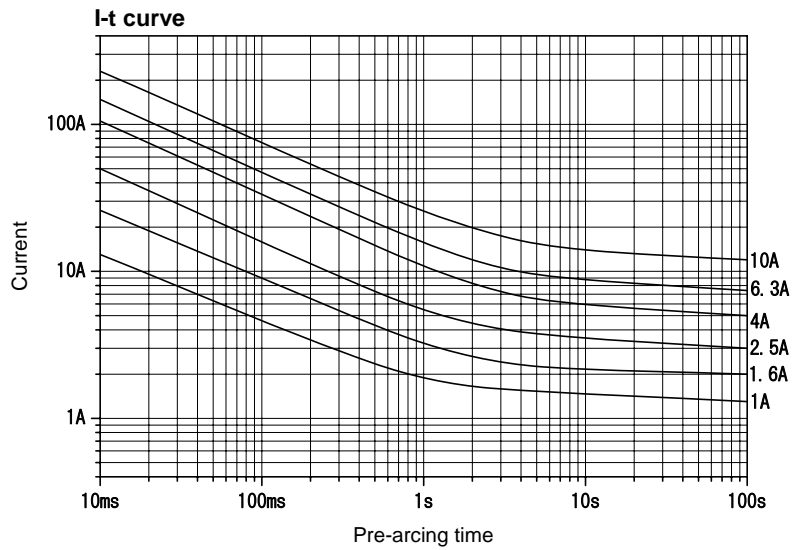

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current	Current carrying capacity	Temp. rise	Overload operation
AC125V	UL Listed CSA Certified	100mA - 8A	10000A	PF 0.7 - 0.8	*3	70K or less at 1.1 I_N 200K or less at 1.0 I_N At 1.1 I_N , 140K or less at the center, 60K or less at the contact
		Over 8A - 10A	500A		*4	
	<PS>E JET ^{*1}	100mA - 10A			*5	
DC125V	UL Listed CSA Certified	Over 8A - 10A	500A	Resistive circuit	*4	200K or less at 1.0 I_N

- *1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.
- *2: Any rated current value can be selected within this range.
- *3: 1.1 I_N for 15 min or more after temperature stabilization occurs.
- *4: 1.0 I_N for 15 min or more after temperature stabilization occurs.
- *5: 1.1 I_N until temperature stabilization occurs.