





Scale: 1/1



Lead wire diameter:
 φ 0.5 (80mA - 5A)
 φ 0.8 (Over 5A - 10A)
 φ 1.0 (Over 10A - 15A)

Unit: mm

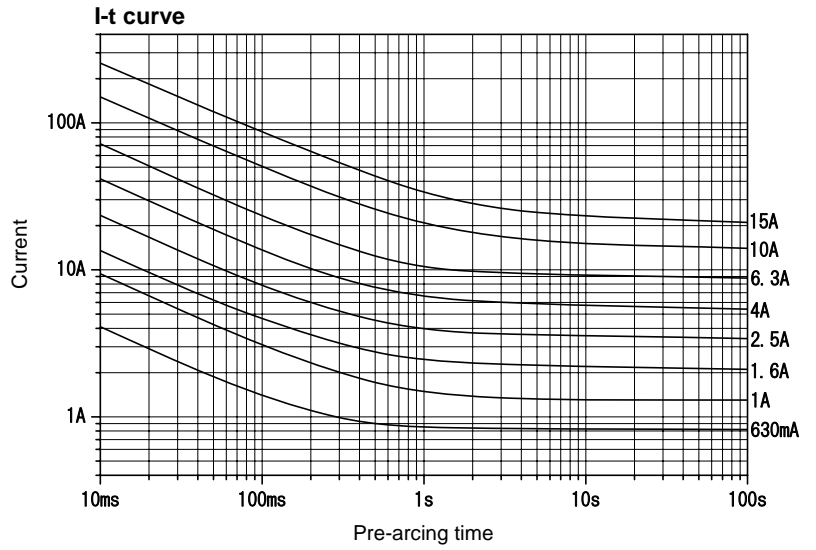

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) *1	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	UL Listed CSA Certified	80mA - 5A	10000A	PF 0.7 - 0.8	*2	70K or less at $1.1I_N$	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$
	UL Recognized CSA Certified	Over 5A - 10A				90K or less at $1.1I_N$	
	CSA Certified	Over 10A - 15A				*3	

*1: Any rated current value can be selected within this range.
 *2: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.
 *3: $1.0 I_N$ for 15 min or more after temperature stabilization occurs.