





Scale: 2/1



Lead wire diameter: $\phi 0.8$

Unit: mm

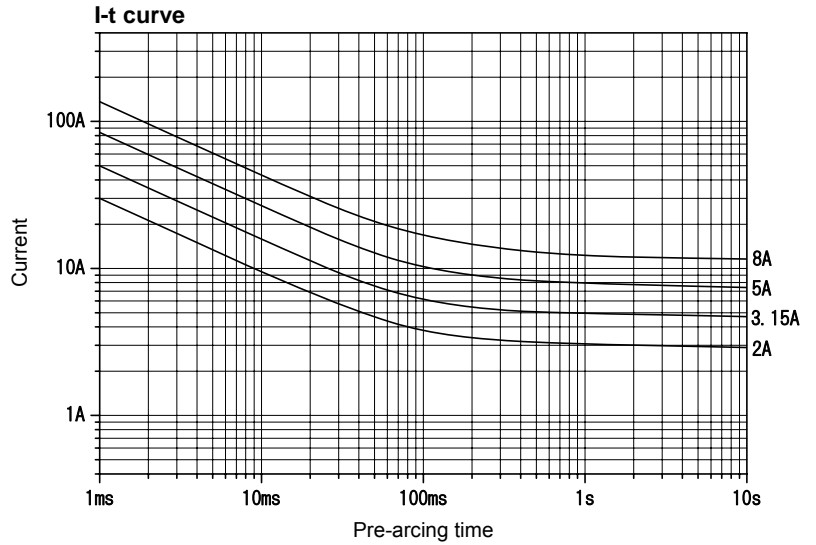


The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC125V	UL Listed	62mA - 10A	50A	15min or more after temperature stabilization occurs.	70K or less	Within 10min at $1.5I_N$ Within 60s at $2.0I_N$
	CSA Certified					

*1: Any rated current value can be selected within this range.




Scale: 2/1



Lead wire diameter: $\phi 0.8$

Unit: mm

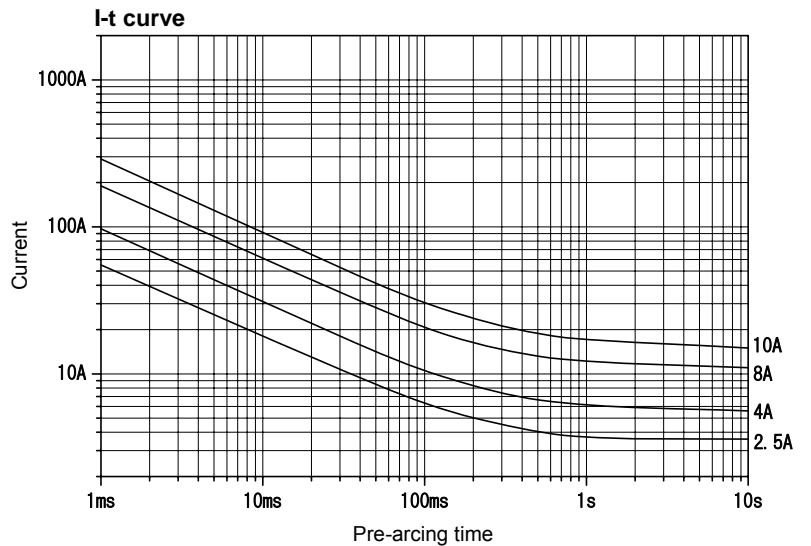

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC125V	UL Listed	100mA - 10A	50A	15min or more after temperature stabilization occurs.	70K or less	Within 10min at $1.5I_N$ Within 60s at $2.0I_N$
	CSA Certified					

*1: Any rated current value can be selected within this range.