





Scale: 1/1



Lead wire diameter: ϕ 1.0

Unit: mm

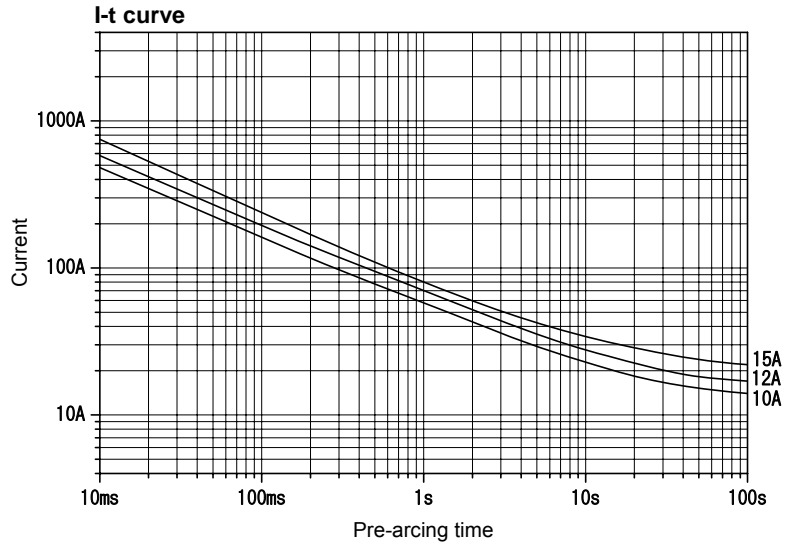


The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current		Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC32V	UL Recognized CSA Certified	Over 8A - 15A	3000A	PF 0.7 - 0.8	15min or more after temperature stabilization occurs.	70K or less	Within 60min at $1.35I_N$ 12s - 2min inclusive at $2.0I_N$

*1: Any rated current value can be selected within this range.




Scale: 2/1



Lead wire diameter: ϕ 0.8

Unit: mm

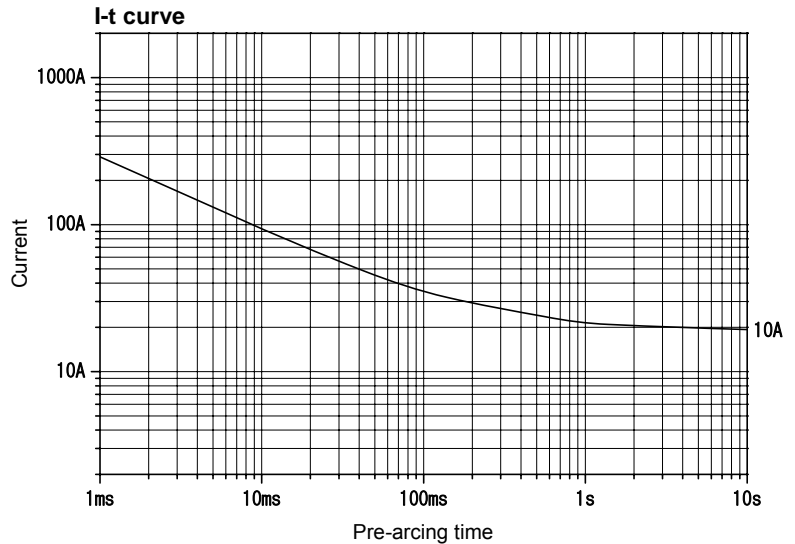

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Maximum working voltage	Certification	Current (I_N) range ^{*1}	Maximum breaking current		Current carrying capacity	Temp. rise $1.0I_N$	Overload operation $2.0I_N$
DC100V	—	100mA - 10A	100A	Resistive circuit	^{*2}	75K or less	Within 60s

*1: Any current value can be selected within this range.

*2: $1.0 I_N$ for 15 min or more after temperature stabilization occurs.