





Scale: 1/1

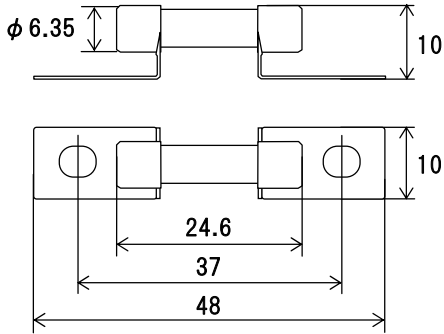

Unit: mm

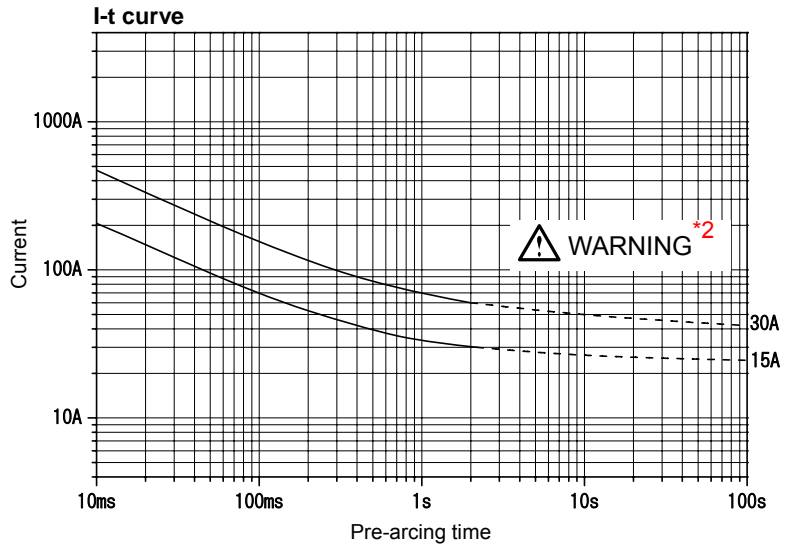

The I-t curves above are plots of the average values of measurements obtained under conditions specified by SOC. These data are for reference only and are not intended to infer any guaranteed values.

Rated voltage	Certification	Rated current (I_N)	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
DC500V	—	5A, 10A, 15A, 20A, 25A, 30A, 35A	1000A	Resistive circuit	1.0 I_N until temperature stabilization occurs.	75K or less at 0.5 I_N	Within 2min at 2.0 I_N

*1: High melting temperature type solder containing more than 85 wt% lead is used in this product.

*2: If the current is less than 2.0 I_N (represented by the dotted portion of the I-t curve), an arc current may continuously pass through the fuse, and it may therefore not be possible to break the current. Do not apply fusing conditions of currents less than 2.0 I_N , as fires and other accidents may occur due to the inability to open the circuit.