

32V11CF (Inrush-withstand)

RoHS **Pb**


AC32V

DC32V


★ Referred to as Type F (Quick-acting) in the certificate issued by SEMKO.




Scale: 10/1

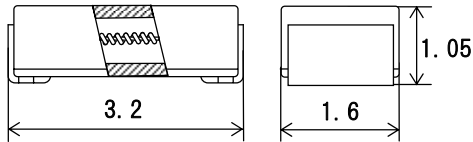

Recommended land pattern for reflow soldering
(Reference dimensions)

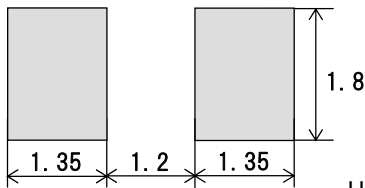

Unit: mm

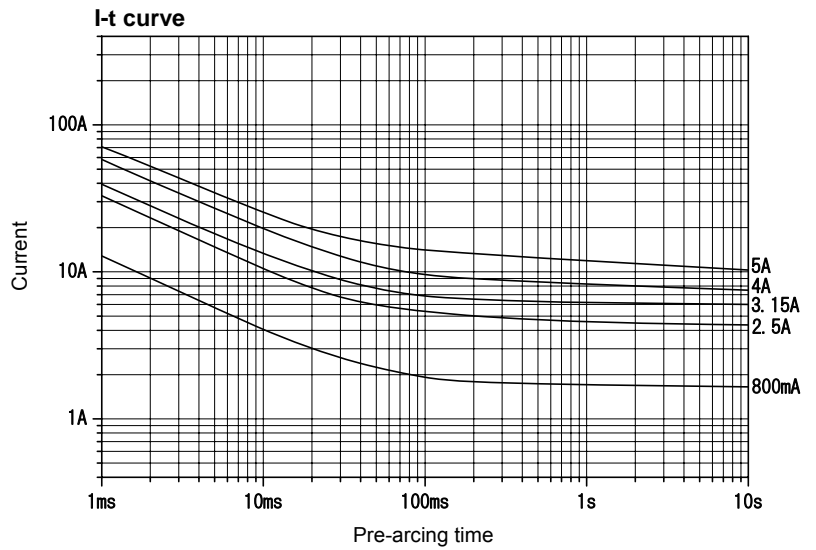

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Rated current (I_N)	Rated breaking current		Current carrying capacity/ Endurance test	Temp. rise	Overload operation
AC32V	SEMKO Certified	800mA, 2.5A, 3.15A, 4A, 5A	50A	Resistive circuit	*1	*2	Within 2min at $2.0I_N$ 0.001s - 0.01s inclusive at $10I_N$
DC32V							

*1: Endurance test: After repeating 100 cycles of $1.05 I_N$ for 1 h and switching-off for 15 min, $1.25 I_N$ can be passed through the fuse for 1 h or more.

*2: 70 K or less on each part of the fuse when measured during the final 5 min of the endurance test at $1.25 I_N$.