


MCF (Quick-acting)

RoHS


AC125V AC100V
DC72V




Scale: 5/1



Recommended land pattern for reflow soldering
(Reference dimensions)



Unit: mm

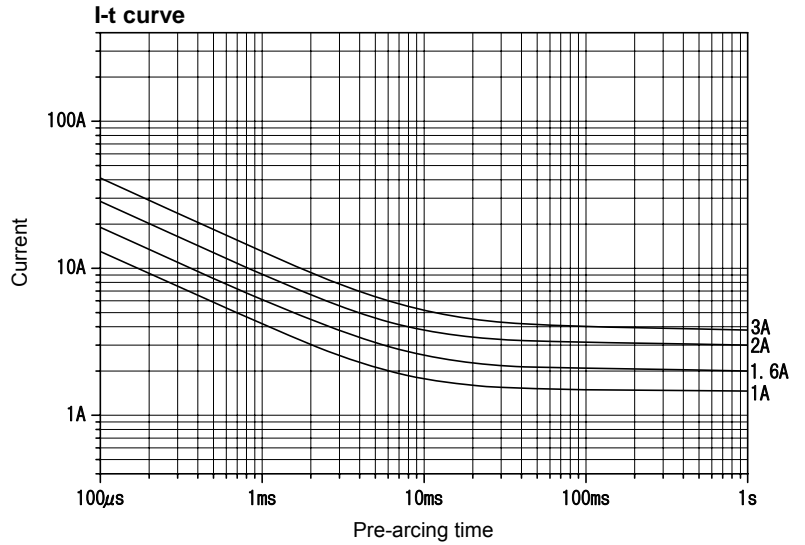

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation $2.0I_N$
AC125V	UL Listed CSA Certified	50mA - 3A	50A	Resistive circuit PF 0.7 - 0.8	Until temperature stabilization occurs.	75K or less
AC100V	<PS>E JET ^{*1}	50mA - 2A	100A			
DC72V	UL Listed CSA Certified	50mA - 3A	50A	Resistive circuit		Within 60s

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

MCFA (Quick-acting)


RoHS

AC125V
DC72V


★This product is coated with resin to improve its sealing performance.^{*1}




Scale: 5/1



Recommended land pattern for reflow soldering
(Reference dimensions)



Unit: mm

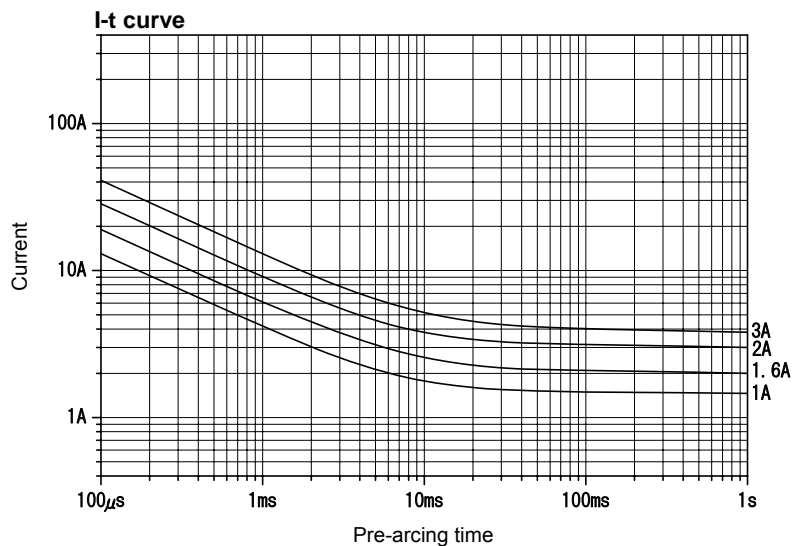

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation $2.0I_N$
AC125V	UL Listed	50mA - 3A	50A	Resistive circuit	Until temperature stabilization occurs.	75K or less
DC72V						

*1: Sealing performance should be tested in the actual equipment as the structure of this product is not hermetically sealed.

*2: Any rated current value can be selected within this range.