


SM4 (Quick-acting)

RoHS **Pb**

AC125V




Scale: 2/1

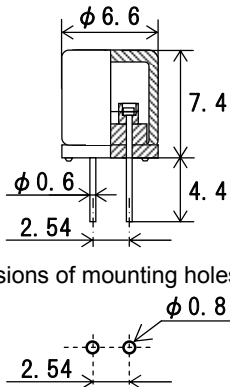

Dimensions of mounting holes

Unit: mm

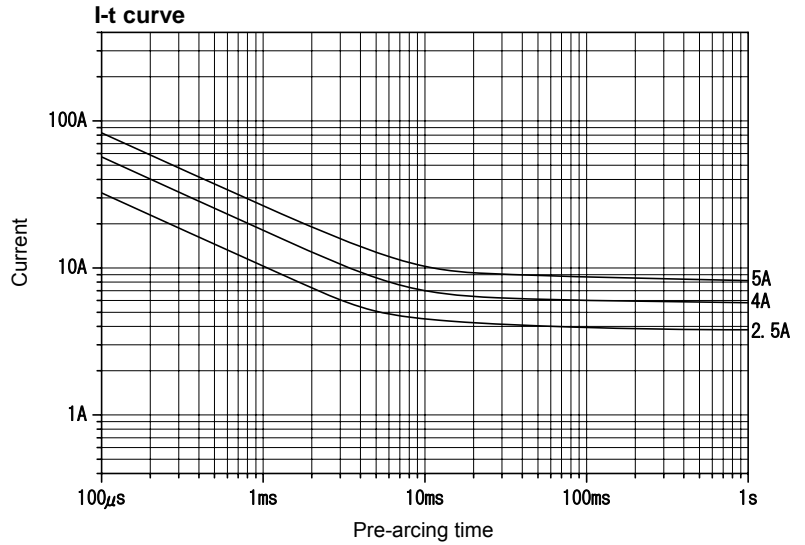

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC125V	UL Listed	63mA - 5A	50A	15min or more after temperature stabilization occurs.	70K or less	Within 10min at $1.5I_N$ Within 60s at $2.0I_N$
	CSA Certified					
	<PS>E JET ^{*1}		100A			

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

PSM (Quick-acting protector)


RoHS **Pb**

AC90V

DC60V




Scale: 2/1

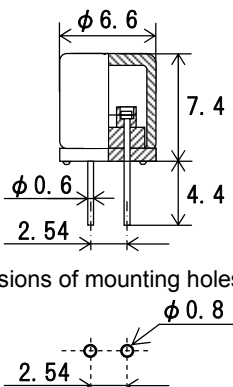

Dimensions of mounting holes

Unit: mm

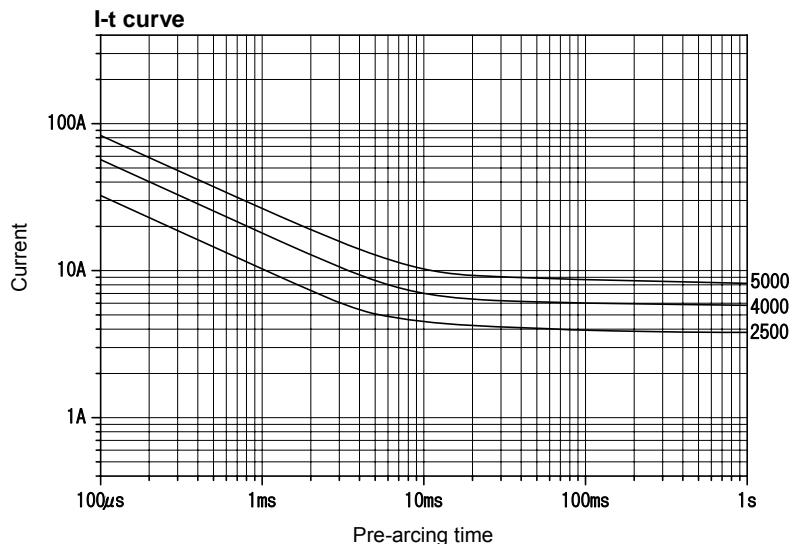

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Maximum working voltage	Certification	Current (I_N) range ^{*1}	Maximum breaking current	Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC90V	—	63mA - 5A	50A	Resistive circuit	70K or less	Within 10min at $1.5I_N$ Within 60s at $2.0I_N$
DC60V						

*1: Any current value can be selected within this range.

The numeric value "250" shown on this product and its packaging expresses a current value obtained from multiplying 0.25 A by 1000.