





Scale: 1/1



Unit: mm

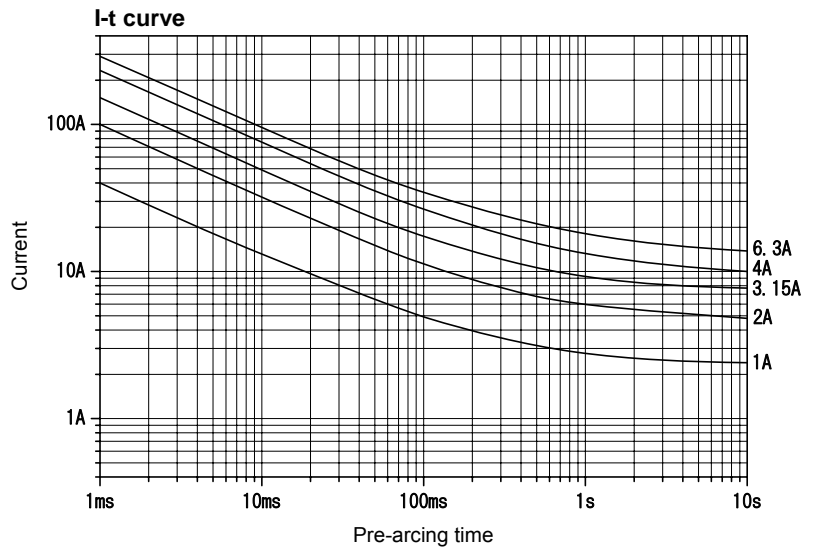

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)	Rated breaking current	Current carrying capacity/ Endurance test	Temp. rise $1.0I_N$	Pre-arcing time/current characteristic	
AC500V	UL Recognized CSA Component Acceptance	500mA - 6.3A ^{*1}	80A	Resistive circuit	75K or less	Within 30min at $2.1I_N$	
AC400V		1A, 1.6A, 2A, 3A, 3.15A, 4A, 5A, 6.3A	500A			^{*2}	^{*3}
DC400V	SEMKO Certified	1A, 1.6A, 2A, 3A, 3.15A, 4A, 5A, 6.3A	200A			4h or more at $1.0I_N$	Within 30min at $2.1I_N$
DC250V	UL Recognized CSA Component Acceptance	500mA - 6.3A ^{*1}	1500A 2000A				

*1: Any rated current value can be selected within this range.

*2: After repeating 100 cycles of $1.2 I_N$ for 1 h and switching-off for 15 min, $1.5 I_N$ can be passed through the fuse for 1 h or more.

*3:

Rated current	$2.1I_N$	$2.75I_N$	$4.0I_N$	$10I_N$
1A	Within 30min	0.3s - 2s	0.095s - 0.5s	0.01s - 0.03s
1.6A, 2A		1s - 30s	0.095s - 1s	0.01s - 0.05s
3A - 6.3A			0.15s - 1s	0.02s - 0.1s