





Scale: 1/1



Unit: mm

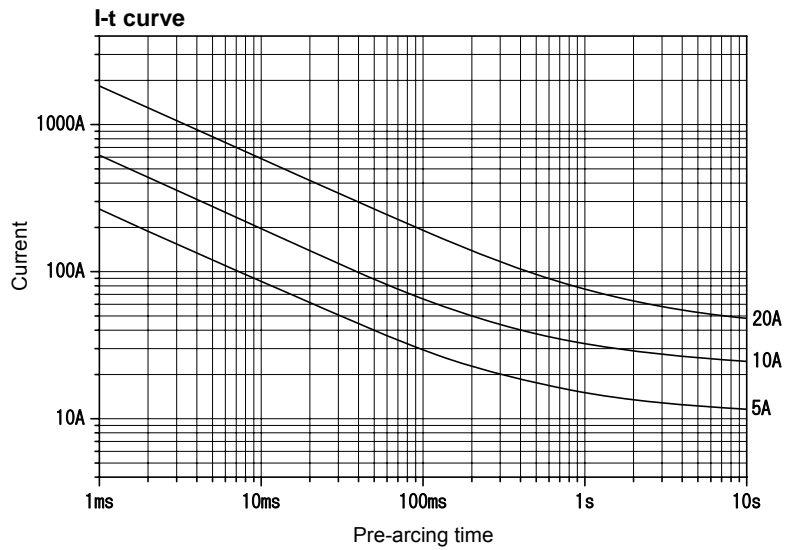

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current ( $I_N$ )	Rated breaking current		Current carrying capacity/ Endurance test	Temp. rise $1.0I_N$	Pre-arcing time/current characteristic
AC400V	UL Recognized CSA Component Acceptance	5A - 20A <sup>*1</sup>	500A	Resistive circuit	4h or more at $1.0I_N$	75K or less	Within 30min at $2.1I_N$
	SEMKO Certified	10A, 15A, 20A			<sup>*2</sup>	—	<sup>*3</sup>
DC400V	UL Recognized CSA Component Acceptance	5A - 20A <sup>*1</sup>			4h or more at $1.0I_N$	75K or less	Within 30min at $2.1I_N$
	SEMKO Certified	10A, 15A, 20A			<sup>*2</sup>	—	<sup>*3</sup>

\*1: Any rated current value can be selected within this range.

\*2: After repeating 100 cycles of  $1.2 I_N$  for 1 h and switching-off for 15 min,  $1.5 I_N$  can be passed through the fuse for 1 h or more.

\*3:

Rated current	$2.1I_N$	$2.75I_N$	$4.0I_N$	$10I_N$
10A, 15A, 20A	Within 30min	1s - 80s	0.15s - 5s	0.02s - 0.1s