


SHV16 (Inrush-withstand)

RoHS


DC700V



Scale: 1/1



Unit: mm

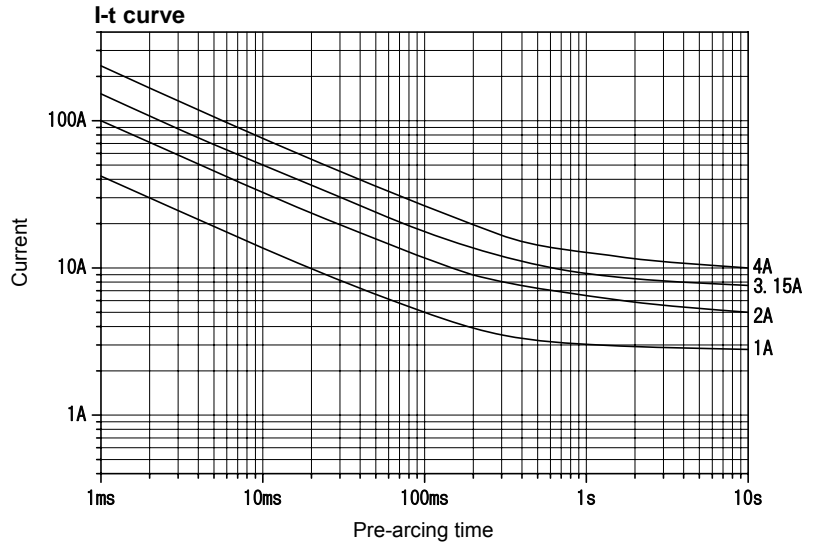

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

| Rated voltage | Certification | Range of rated current (I_N)*1 | Rated breaking current | | Current carrying capacity $1.0I_N$ | Temp. rise $1.0I_N$ | Overload operation $2.1I_N$ |
|---------------|---------------|------------------------------------|------------------------|-------------------|---|------------------------|--------------------------------|
| DC700V | UL Recognized | 1A - 4A | 500A | Resistive circuit | Until temperature stabilization occurs. | 75K or less | Within 30min |

*1: Any rated current value can be selected within this range.


SHV22 (Inrush-withstand)

RoHS


DC500V



Scale: 1/1

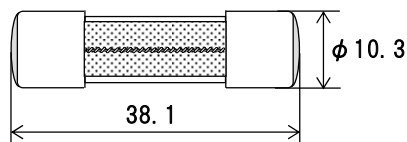

Unit: mm

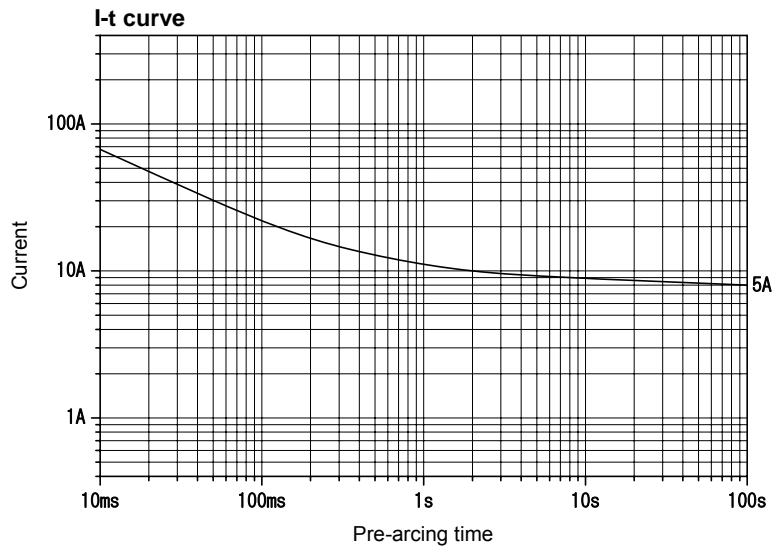

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

| Rated voltage | Certification | Range of rated current (I_N)*1 | Rated breaking current | | Current carrying capacity $1.0I_N$ | Temp. rise $1.0I_N$ | Overload operation |
|---------------|--------------------|------------------------------------|------------------------|-------------------|---|------------------------|--|
| DC500V | C-UL US Recognized | 1A - 10A | 1000A | Resistive circuit | Until temperature stabilization occurs. | 75K or less | Within 60min at $1.35I_N$ Within 2min at $2.0I_N$ |

*1: Any rated current value can be selected within this range.