

HT N5 (Time-lag, high-breaking capacity)

1A - 6.3A:

RoHS

Pb


8A - 10A:

RoHS


AC250V



Scale: 1/1



Unit: mm

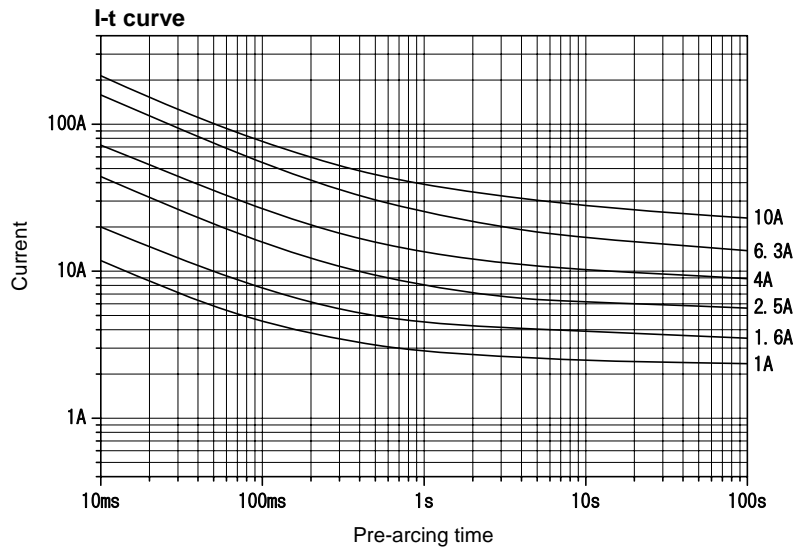

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Rated current (I_N)	Rated breaking current		Endurance test	Test at elevated temp.	Pre-arcing time/ current characteristic
AC250V	UL Recognized CSA Component Acceptance SEMKO Certified BSI Licensed <PS>E JET	1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A, 6.3A	1500A	PF 0.7 - 0.8	*1	*2	*3
	C-UL US Recognized SEMKO Certified BSI Licensed <PS>E JET	8A, 10A					

*1: After repeating 100 cycles of 1.2 I_N for 1 h and switching-off for 15 min, 1.5 I_N can be passed through the fuse for 1 h or more.

*2: 1.1 I_N can be passed through the fuse for 1 h or more at 70±2 °C.

*3:

Rated current	2.1 I_N	2.75 I_N	4.0 I_N	10 I_N
1A - 3.15A	Within 30min	0.75s - 80s	0.095s - 5s	0.01s - 0.15s
4A - 10A			0.15s - 5s	