





Scale: 1/1



Unit: mm

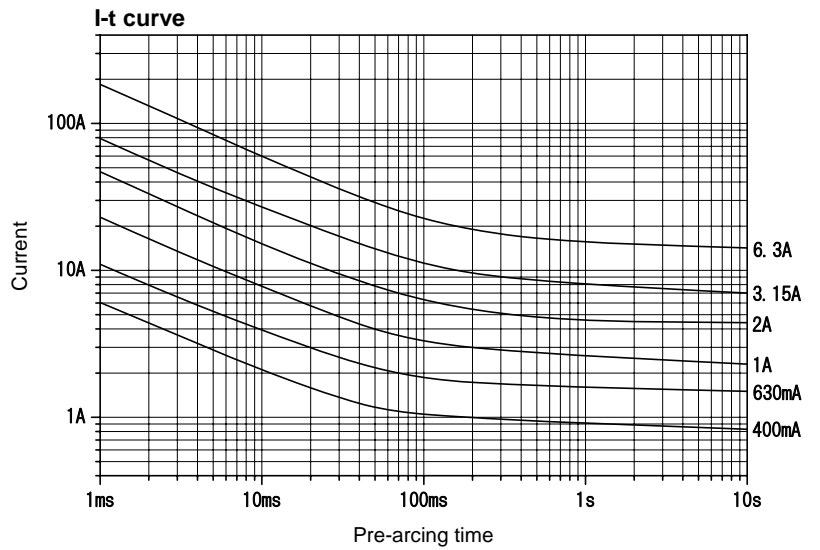

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Rated current ( $I_N$ )	Rated breaking current		Endurance test	Pre-arcing time/ current characteristic
AC250V	UL Recognized SEMKO Certified	400mA, 500mA, 630mA, 800mA, 1A, 1.25A, 1.6A, 2 A, 2.5A, 3.15A, 4A, 5A, 6.3 A	1500A	PF 0.7 - 0.8	*1	*2

\*1: After repeating 100 cycles of 1.2  $I_N$  for 1 h and switching-off for 15 min, 1.5  $I_N$  can be passed through the fuse for 1 h or more.

\*2:

Rated current	$2.1 I_N$	$2.75 I_N$	$4.0 I_N$	$10 I_N$
400mA - 3.15A	Within 30min	0.01s - 2s	0.003s - 0.3s	Within 0.02s
4A - 6.3A		0.01s - 3s		