





Scale: 1/1



Unit: mm

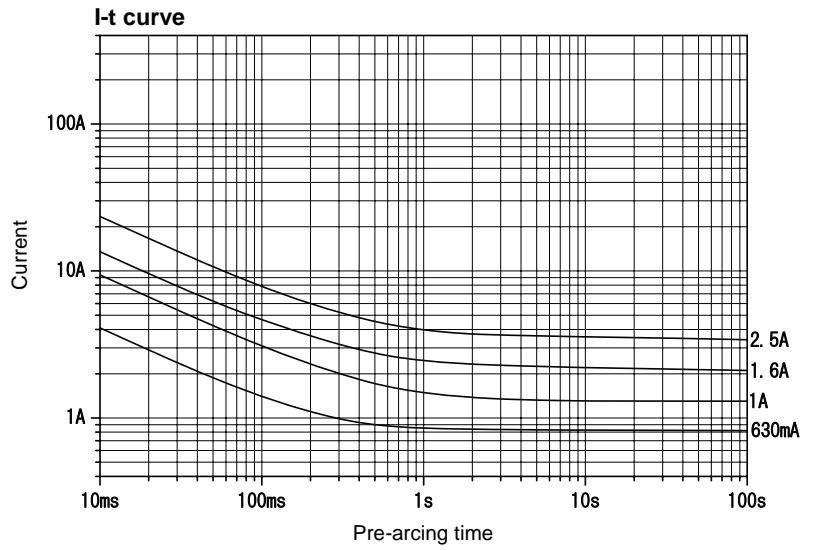

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*2	Rated breaking current		Current carrying capacity	Temp. rise $1.1 I_N$	Overload operation
AC250V	UL Listed CSA Certified	80mA - 3A	100A	PF 0.7 - 0.8	*3 1.1 I_N until temperature stabilization occurs.	70K or less 140K or less at the center, 60K or less at the contact	Within 60min at 1.35 I_N Within 2min at 2.0 I_N
	<PS>E JET*1						

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

*3: 1.1 I_N for 15 min or more after temperature stabilization occurs.