

SKM4 (Inrush-withstand)


250mA - 25A: RoHS Pb
 Over 25A - 30A: RoHS

AC125V


DC65V



Scale: 1/1



Unit: mm

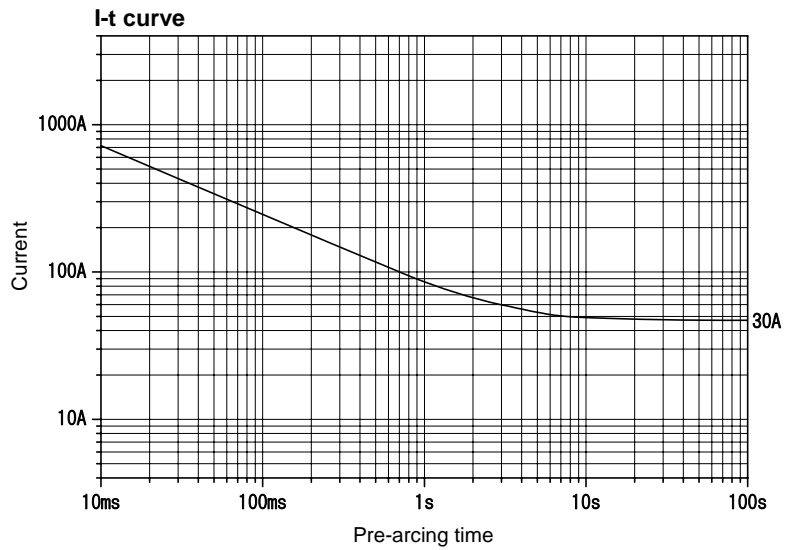

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*1}	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	UL Listed CSA Certified	250mA - 20A	10000A	PF 0.7 - 0.8	^{*2}	70K or less at $1.1I_N$	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$
	UL Recognized CSA Component Acceptance	Over 20A - 30A	5000A	Resistive circuit	^{*3}	80K or less at $1.0I_N$	
DC65V	UL Listed CSA Certified	250mA - 20A	5000A	Resistive circuit	^{*2}	70K or less at $1.1I_N$	
	UL Recognized CSA Component Acceptance	Over 20A - 30A			^{*3}	80K or less at $1.0I_N$	

^{*1}: Any rated current value can be selected within this range.
^{*2}: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.
^{*3}: $1.0 I_N$ for 15 min or more after temperature stabilization occurs.