





Scale: 1/1



Unit: mm

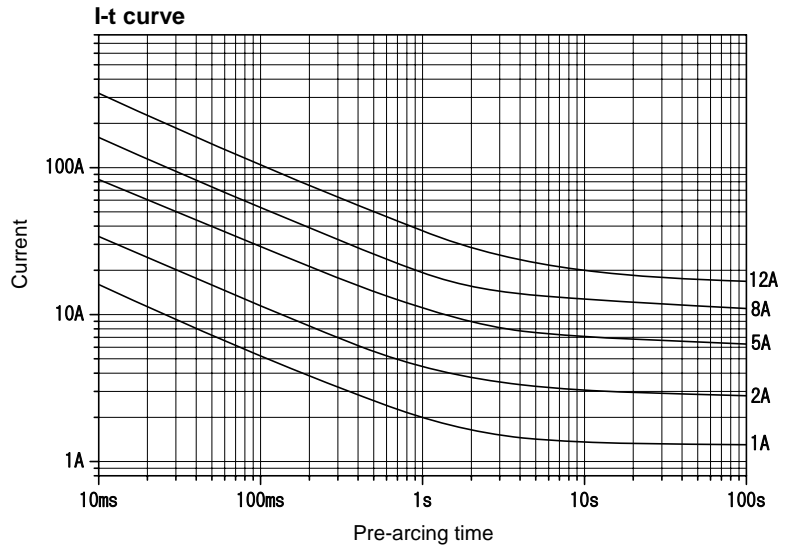

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

| Rated voltage | Certification              | Range of rated current ( $I_N$ ) <sup>*2</sup> | Rated breaking current |                 | Current carrying capacity | Temp. rise $1.1 I_N$  | Overload operation   |
|---------------|----------------------------|--|------------------------|-----------------|---------------------------|---|--|
| AC125V        | UL Listed<br>CSA Certified | 100mA - 15A                                    | 10000A                 | PF<br>0.7 - 0.8 | <sup>*3</sup>             | 70K or less   | Within 60min<br>at $1.35 I_N$<br>Within 2min<br>at $2.0 I_N$ |
|               | <PS>E JET <sup>*1</sup>    |  | 500A                   |                 | <sup>*4</sup>             | 140K or less<br>at the center,<br>60K or less<br>at the contact |  |

<sup>\*1</sup>: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

<sup>\*2</sup>: Any rated current value can be selected within this range.

<sup>\*3</sup>:  $1.1 I_N$  for 15 min or more after temperature stabilization occurs.

<sup>\*4</sup>:  $1.1 I_N$  until temperature stabilization occurs.