


SL2 (Normal-acting)

RoHS **Pb**


AC125V



Scale: 1/1



Unit: mm

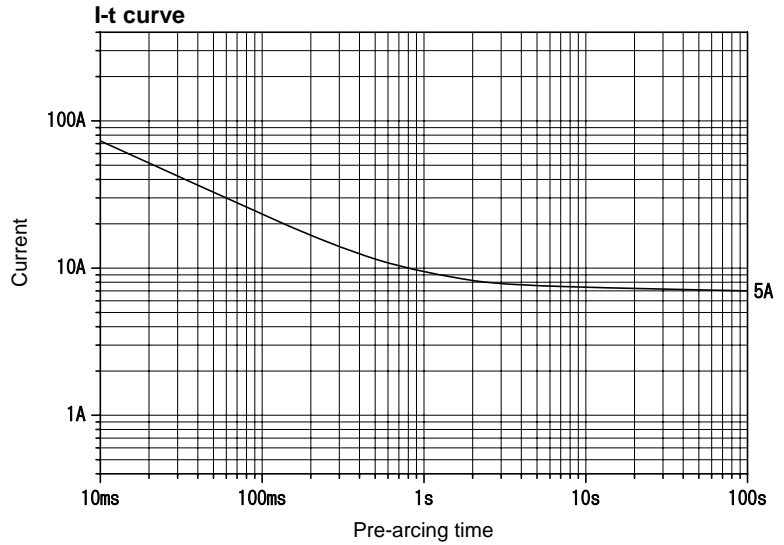

The I-t curve above is based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current		Current carrying capacity $1.1 I_N$	Temp. rise $1.1 I_N$	Overload operation
AC125V	UL Listed CSA Certified	80mA - 6A	10000A	PF 0.7 - 0.8	15min or more after temperature stabilization occurs.	70K or less	Within 60min at $1.35 I_N$ Within 2min at $2.0 I_N$

*1: Any rated current value can be selected within this range.


SU2 (Normal-acting)

100mA - 15A: RoHS **Pb**
Over 15A - 20A: RoHS


AC125V



Scale: 1/1



Unit: mm

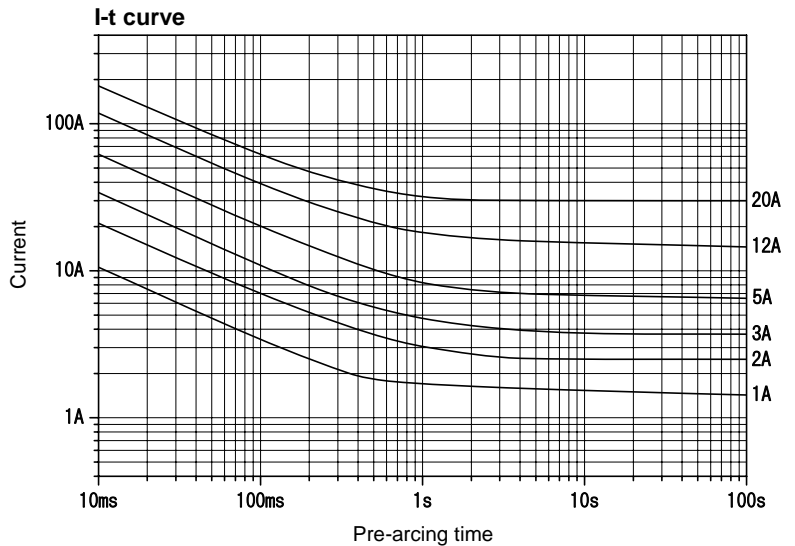

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	UL Recognized	100mA - 5A	200A	PF 0.7 - 0.8	*2	70K or less at $1.1 I_N$	Within 60min at $1.35 I_N$ Within 2min at $2.0 I_N$
		Over 5A - 12A					
		Over 12A - 20A		100K or less at $1.0 I_N$			

*1: Any rated current value can be selected within this range.

*2: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.

*3: $1.0 I_N$ for 15 min or more after temperature stabilization occurs.