





Scale: 1/1



Unit: mm

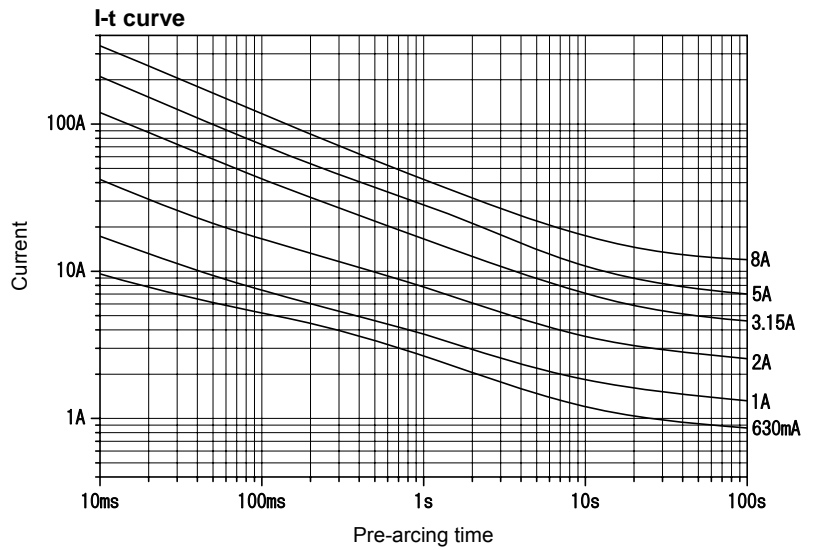

The I-t curves above are plots of the average values of measurements obtained under conditions specified by SOC. These data are for reference only and are not intended to infer any guaranteed values.

Rated voltage	Certification *2	Range of rated current (I_N) *3	Rated breaking current		Current carrying capacity	Temp. rise	Overload operation
AC125V	<PS>E JET	100mA - 5A	500A	PF 0.7 - 0.8	1.1 I_N until temperature stabilization occurs.	At 1.1 I_N , 140K or less at the center, 60K or less at the contact	*4
		Over 5A - 8A	100A				

*1: High melting temperature type solder containing more than 85 wt% lead is used in this product.

*2: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*3: Any rated current value can be selected within this range.

*4:

Rated current	1.35 I_N	2.0 I_N
100mA - 3A	Within 60min	5s - 2min
Over 3A - 8A		12s - 2min