



# SQ7

Normal-acting

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

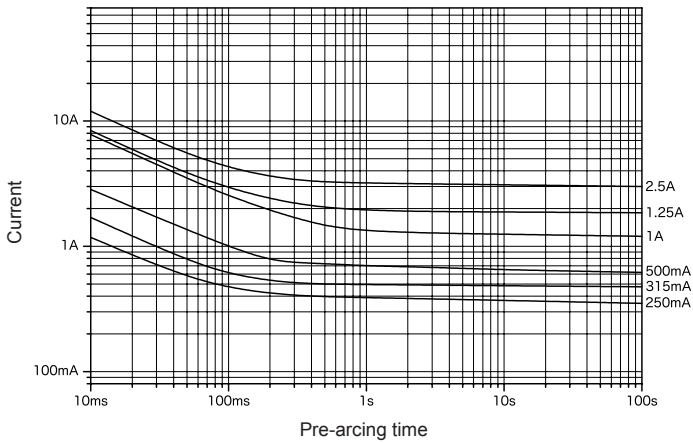

Lead wire diameter  $\phi$  0.8

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I <sub>N</sub> ) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 125 V		80 mA–3 A	10000 A	PF 0.7–0.8	70 K or less at 1.1 I <sub>N</sub>	1.1 I <sub>N</sub> for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I <sub>N</sub> Within 2 min at 2.0 I <sub>N</sub>

\*1: Customer-requested rated current values can be supplied from within the given range.



# SQ8

Normal-acting

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

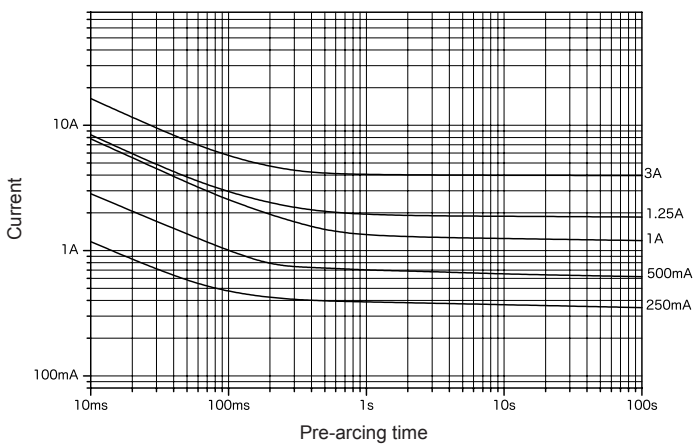

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I <sub>N</sub> ) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 125 V		80 mA–3 A	10000 A	PF 0.7–0.8	70 K or less at 1.1 I <sub>N</sub>	1.1 I <sub>N</sub> for 15 min or more after temperature stabilization occurs	Within 60 min at 1.35 I <sub>N</sub> Within 2 min at 2.0 I <sub>N</sub>

\*1: Customer-requested rated current values can be supplied from within the given range.