



Representative pre-arcing time-current characteristics

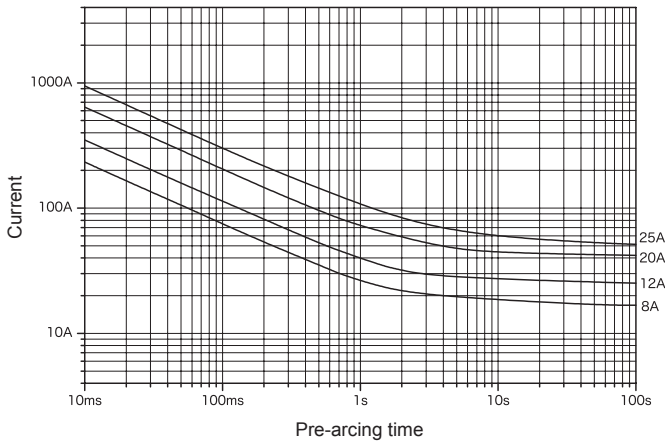

Scale: 1/1 (mm)

Rated voltage	Certification	Rated current (I_N)	Rated breaking current		Endurance test	Test at elevated temperature	Pre-arcing time-current characteristics
AC 250 V		8 A	250 A	Resistive circuit	*1	*2	*3
		10 A					
		12 A	100 A	PF 0.7-0.8			
		15 A					
		20 A					
		25 A					

*1: After 100 cycles of 1.2 I_N 1 h on / 15 min off, 1.5 I_N is passed through the fuse for 1 h.

*2: A current of 1.1 I_N is passed through the fuse for 1 h at a temperature of 70±2 °C.

*3:

2.1 I_N	2.75 I_N	4.0 I_N	10 I_N
Within 30 min	0.6 s-10 s	0.15 s-3 s	0.02 s-0.3 s

*4: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.