

11CFB



Quick-acting

RoHS-compliant


Pb free

This product increases the 11CF's maximum usage temperature to 125 °C

Representative pre-arcing time-current characteristics

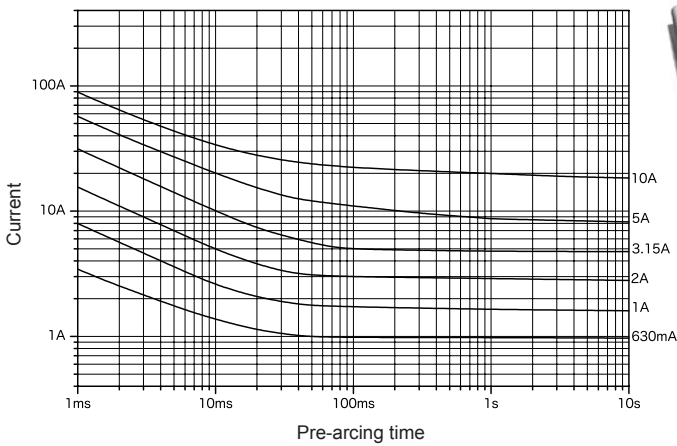

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 72 V		100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 I_N	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N

*1: Customer-requested rated current values can be supplied from within the given range.

11CTB



Inrush-withstand

RoHS-compliant


Pb free

This product increases the 11CT's maximum usage temperature to 125 °C

Representative pre-arcing time-current characteristics

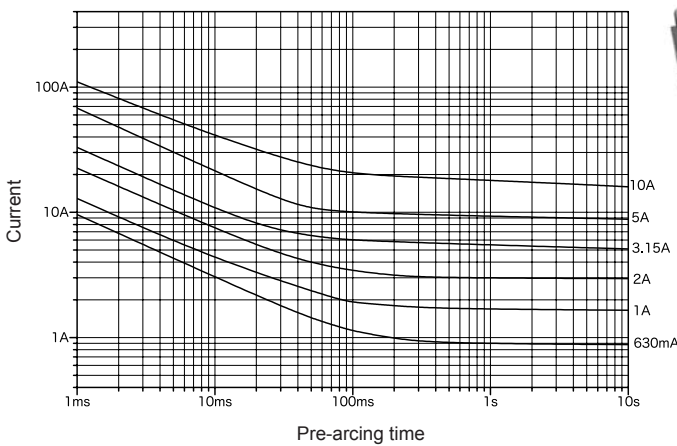

Land pattern for reflow soldering (reference dimensions)



Scale: 8/1 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 72 V		100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 I_N	1.0 I_N until temperature stabilization occurs	Within 60 s at 2.0 I_N

*1: Customer-requested rated current values can be supplied from within the given range.