




# DC35V11CT

Inrush-withstand

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

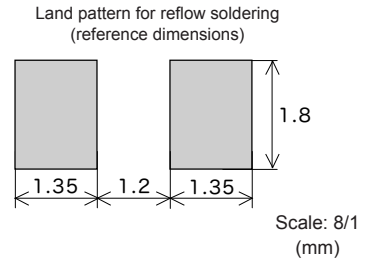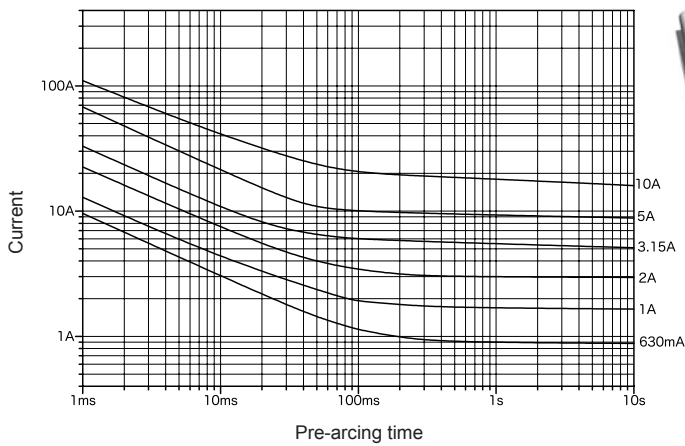

Rated voltage	Certification	Rated current ( $I_N$ ) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 35 V		100 mA–10 A	50 A	Resistive circuit	75 K or less at 1.0 $I_N$	1.0 $I_N$ until temperature stabilization occurs	Within 60 s at 2.0 $I_N$

\*1: Customer-requested rated current values can be supplied from within the given range.




# DC86V11CT

Inrush-withstand

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

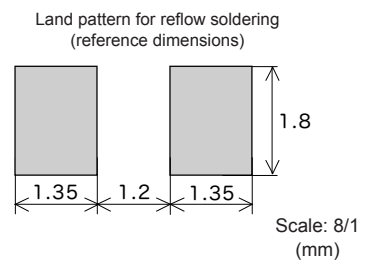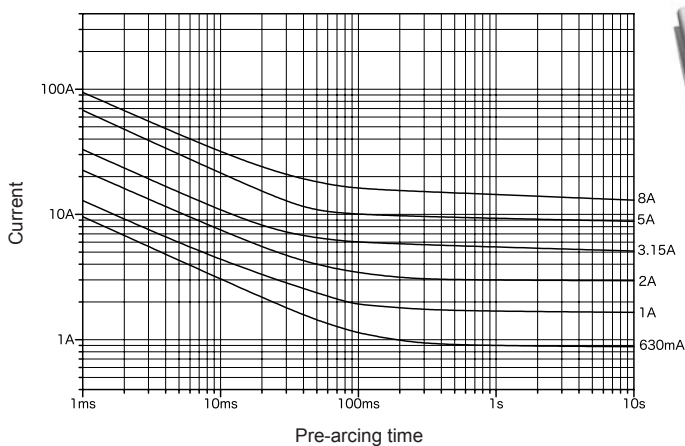

Rated voltage	Certification	Rated current ( $I_N$ ) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
DC 86 V		100 mA–8 A	50 A	Resistive circuit	75 K or less at 1.0 $I_N$	1.0 $I_N$ until temperature stabilization occurs	Within 60 s at 2.0 $I_N$

\*1: Customer-requested rated current values can be supplied from within the given range.