
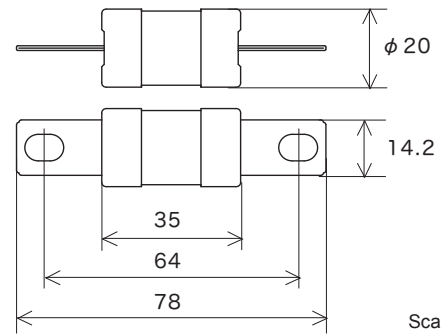


DC450VPT2035

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

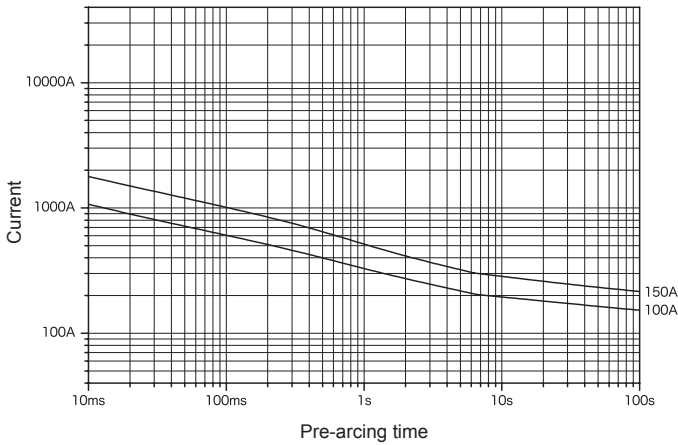

Scale: 1/2 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current	Min. breaking current	Temp. rise	Overload operation
DC 450 V	-	100A 125A 150A	10000 A Resistive circuit	2.0 I_N	50 K or less at 0.5 I_N	*2

*1: Please contact your local SOC sales representative for rated currents which are not listed.

*2:



2.0 I_N	3.0 I_N	5.0 I_N
1 s–300 s	0.2 s–30 s	0.05 s–1 s

DC450VPT2545

RoHS-compliant

Pb free

Representative pre-arcing time-current characteristics

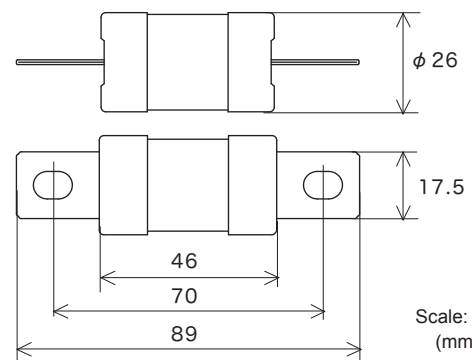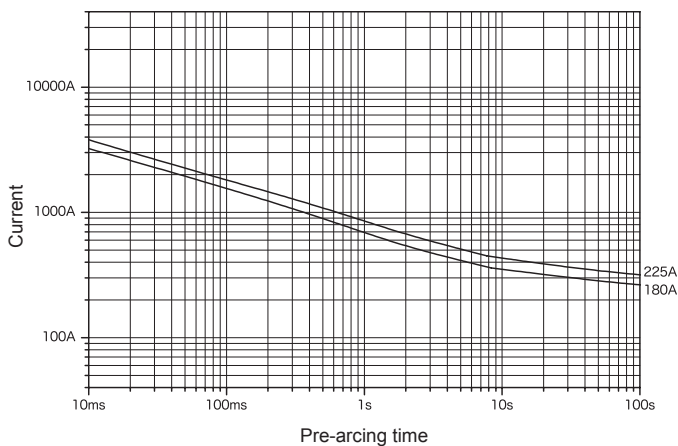

Scale: 1/2 (mm)

Rated voltage	Certification	Rated current (I_N) *1	Rated breaking current	Min. breaking current	Temp. rise	Overload operation
DC 450 V	-	180 A 200 A 225 A	10000 A Resistive circuit	2.0 I_N	50 K or less at 0.5 I_N	*2

*1: Please contact your local SOC sales representative for rated currents which are not listed.

*2:

2.0 I_N	3.0 I_N	5.0 I_N
1 s–300 s	0.2 s–30 s	0.05 s–1 s