
Quick-acting

RoHS-compliant*2

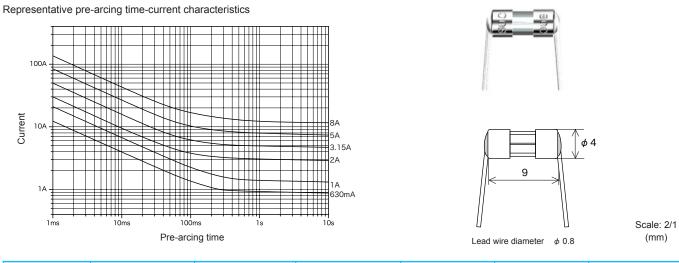

Rated voltage	Certification	Rated current (<i>I</i> _N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 125 V	(H)	62 mA–10 A	50 A	PF 0.7–0.8	70 K or less at 1.0 / _N	1.0 <i>I</i> _N for 15 min or more after temperature stabilization occurs	Within 10 min at 1.5 / _N Within 60 s at 2.0 / _N
	€₽°			PF 0.95–1			

*1: Customer-requested rated current values can be supplied from within the given range.

*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.

NQ3

Representative pre-arcing time-current characteristics 100A Current 10A 8A 10A φ4 4A 2.5A 9 1.25A 1A 1ms 10ms 100ms 1s 10s Scale: 2/1 Pre-arcing time (mm) Lead wire diameter φ0.8

Rated voltage	Certification	Rated current (<i>I</i> _N) *1	Rated breaking current		Temp. rise	Current carrying capacity	Overload operation
AC 250 V	91 °	- 62 mA–10 A	50 A	Resistive circuit	70 K or less at 1.0 <i>I</i> _N	1.0 <i>I</i> _N for 15 min or more after temperature stabilization occurs	Within 10 min at 1.5 / _N Within 60 s at 2.0 / _N
	€₽°			PF 0.95–1			

*1: Customer-requested rated current values can be supplied from within the given range.

*2: This product uses high melting temperature type solder containing 85% by weight or more lead. This type of solder is exempted from the RoHS Directive.