



DC500VBL1030A

RoHS ~~Pb~~


DC500V



Scale: 1/2



Unit: mm

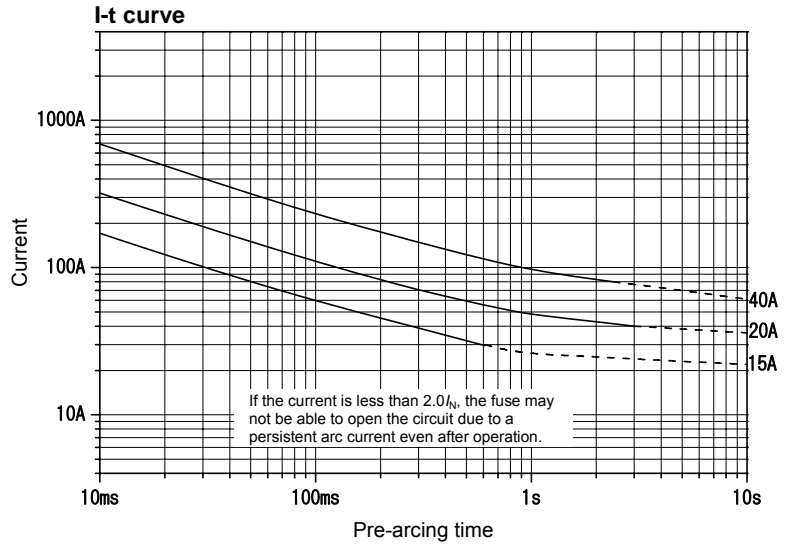

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

| Rated voltage | Certification | Rated current (I_N) | Rated breaking current | | Current carrying capacity $1.0I_N$ | Temp. rise $1.0I_N$ | Overload operation $2.0I_N$ |
|---------------|---------------|-------------------------|------------------------|-------------------|---|---------------------|-----------------------------|
| DC500V | — | 15A, 20A, 30A, 40A, 50A | 1000A | Resistive circuit | Until temperature stabilization occurs. | 150K or less | Within 2min |



DC500VBC625

RoHS


DC500V



Scale: 1/1

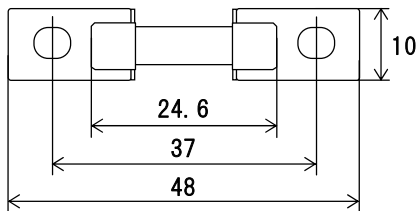

Unit: mm

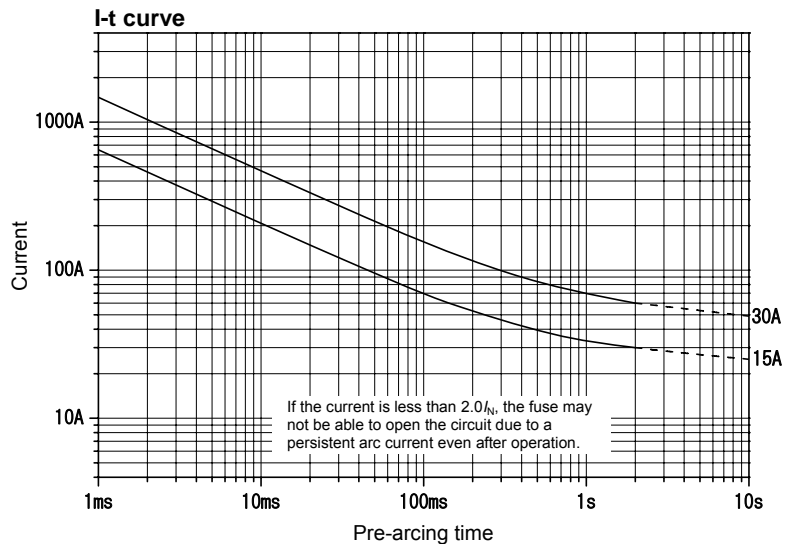

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

| Rated voltage | Certification | Rated current (I_N) | Rated breaking current | | Current carrying capacity $1.0I_N$ | Temp. rise $0.5I_N$ | Overload operation $2.0I_N$ |
|---------------|---------------|-------------------------|------------------------|-------------------|---|---------------------|-----------------------------|
| DC500V | — | 10A, 15A, 20A, 30A, 35A | 1000A | Resistive circuit | Until temperature stabilization occurs. | 75K or less | Within 2min |