





Scale: 1/1



Unit: mm

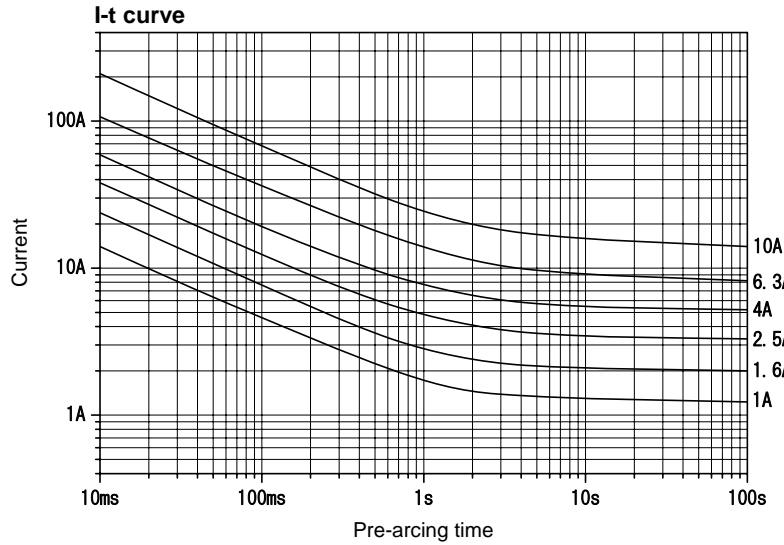


The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*1	Rated breaking current	Current carrying capacity $1.1I_N$	Temp. rise $1.1I_N$	Overload operation
AC125V	UL Listed CSA Certified	100mA - 10A	10000A	PF 0.7 - 0.8	15min or more after temperature stabilization occurs.	70K or less Within 60min at $1.35I_N$ Within 2min at $2.0I_N$


*1: Any rated current value can be selected within this range.



Scale: 1/1



Unit: mm

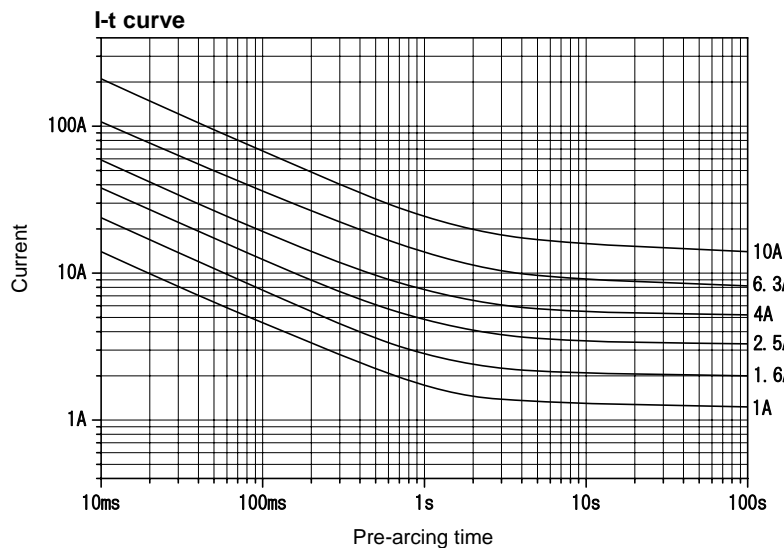

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N)*2	Rated breaking current	Current carrying capacity	Temp. rise $1.1I_N$	Overload operation
AC125V	UL Listed CSA Certified	100mA - 10A	10000A	*3 $1.1I_N$ until temper- ature stabilization occurs.	70K or less	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$
	<PS>E JET *1		500A		PF 0.7 - 0.8	

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

*3: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.