





Scale: 1/1



Lead wire diameter:
 ϕ 0.5 (80mA - 5A)
 ϕ 0.8 (Over 5A - 6.3A)

Unit: mm

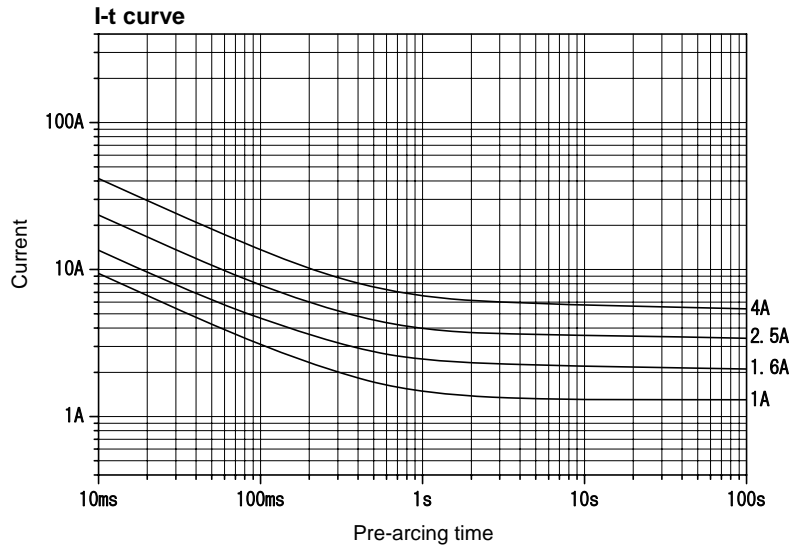

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) ^{*2}	Rated breaking current		Current carrying capacity	Temp. rise $1.1 I_N$	Overload operation
AC125V	UL Listed CSA Certified	80mA - 5A	10000A	PF 0.7 - 0.8	*3	70K or less	Within 60min at $1.35 I_N$ Within 2min at $2.0 I_N$
	UL Recognized CSA Certified	Over 5A - 6.3A				90K or less	
	<PS>E JET ^{*1}	80mA - 6.3A	500A			*4	

*1: Fuses with rated currents below 1 A are not covered under the Electrical Appliance and Material Safety Law.

*2: Any rated current value can be selected within this range.

*3: $1.1 I_N$ for 15 min or more after temperature stabilization occurs.

*4: $1.1 I_N$ until temperature stabilization occurs.