





Scale: 1/1

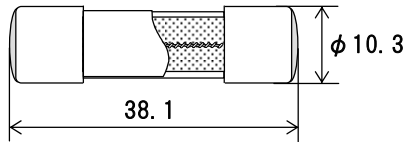

Unit: mm

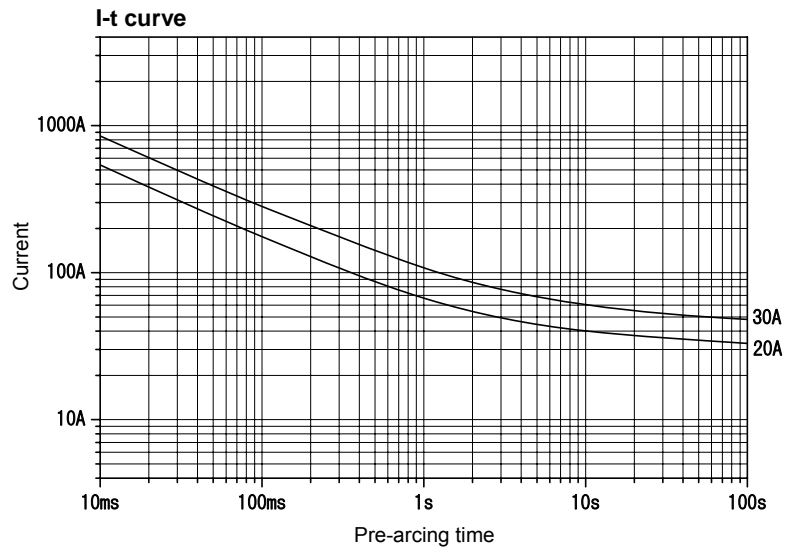

The I-t curves above are based on the average values of measurements obtained under testing conditions specified by our company. The information is for reference purposes only, and is not intended to infer any guarantees of performance.

Rated voltage	Certification	Range of rated current (I_N) *1	Rated breaking current		Current carrying capacity $1.0I_N$	Temp. rise $1.0I_N$	Overload operation
AC250V	UL Recognized CSA Component Acceptance	20A - 30A	10000A	PF 0.7 - 0.8	Until temperature stabilization occurs.	120K or less	Within 60min at $1.35I_N$ Within 2min at $2.0I_N$
	<PS>E JET		1500A			140K or less at the center, 60K or less at the contact	Within 60min at $1.5I_N$

*1: Any rated current value can be selected within this range.